

CTSB-2/CTSG-1

INSULATE
SEAL
PROTECT



TAPE SEALANT

CTSB-2: Specially designed, rubber based, black sealant tape for use with heat shrink tubing

CTSG-1: Cross-linked, grey butyl tape suitable for continuous high temperature applications

FEATURES AND BENEFITS

CTSB-2


- Excellent adhesion to PVC, PE and steel
- Softens to fill voids
- Remains flexible over time
- Non-conductive
- Superior waterproof seal when used with other DSG-Canusa products
- Continuous operating temperature: -30°C to 85°C

CTSG-1

- Protects sharp edges and smooths out transitions
- Environmentally seals areas and tubing
- Non-conductive
- Excellent high temperature performance
- Resistant to common fluids and solvents
- High dielectric strength (310 V/mil)
- Continuous operating temperature: -30°C to 105°C

TYPICAL APPLICATIONS

- Insulating and sealing electrical connections
- Padding over irregular surfaces

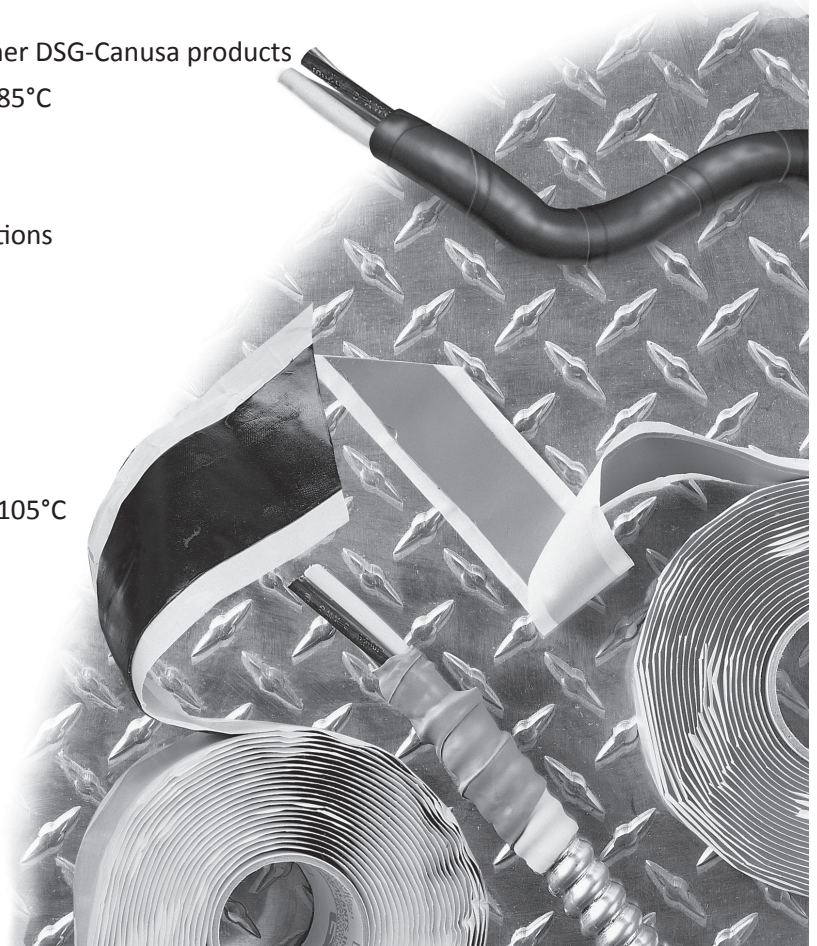

CTSB-2/CTSG-1

TAPE SEALANT

DIMENSIONS

ORDER NUMBER	WIDTH		THICKNESS		ROLL LENGTH	
	MM	IN	MM	IN	MM	IN
CTSB-2 (Black)	50.8	2.0	1.5	0.06	7620	300
CTSG-1 (Grey)	25.4	1.0	1.5	0.06	7620	300

ORDERING

- Select the appropriate tape sealant.
- Please specify the product name plus the options you require
- Order Example: CTSG-1

Please contact your Customer Service Representative for information on tape sealant and material data sheet.

All information contained in this data sheet is believed to be reliable. We advise, however, that customers should separately evaluate the suitability of our products for their particular application. DSG-Canusa and ShawCor give no guarantees in respect of the accuracy or sufficiency of the information presented and disclaim any liability regarding its use. Our responsibilities are only those listed in our Standard Terms and Conditions of Sale for these products. In no instance will we be liable for any eventual, indirect or consequential damage or damages arising from the sale, resale, transfer, use or misuse of the product.