



# PRODUCTION DRAWING

REV:	DATE:	REASON
C	APR.02.24	CHNAGE PACKING.
D	APR.26.24	CHNAGE CABLE SPEC

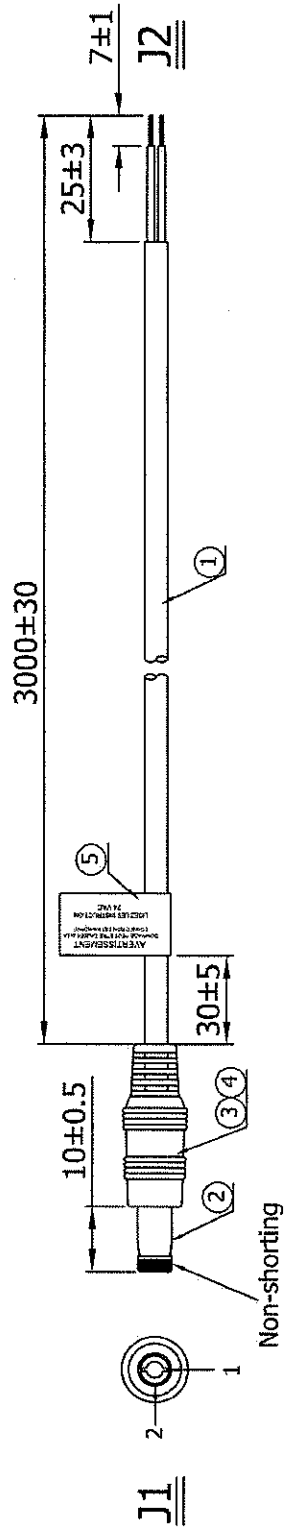

### PIN ASSIGNMENTS

J1	COLOR	J2
1	RED	TINNED
2	BLACK	TINNED

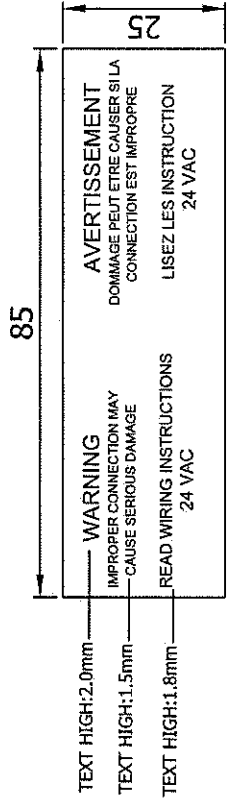

**LABEL** 1.TEXT TYPE:Arial  
2.BLACK TEXT RED COLOR BACKGROUND

**NOTE:**  
1.UNIT:mm  
2.TEST:

- a.THE FINISHED PRODUCTS MUST BE 100%.CIRCUIT,SHORT CIRCUIT,TESTING;
- b.INSULATION RESISTANCE TEST:2M ohm MIN./300V DC, 10mS;
- c.CONTACT RESISTANCE TEST:5 ohm Max.

NO.	DESCRIPTION	Q'TY	REMARK
5	LABEL 85*25 RED BACKGROUND AND BLACK TEXT LABELING	1PC	
4	OUTER MOLD T-11360 PVC EY-11#(BLACK) 45P		
3	INNER MOLD T-22727 PE EY-12#		
2	DC PLUG Ø 5.5*2.5mm NICKEL PLATED BLACK	1PC	
1	CABLE General Cable: P/N:E2202S P/N:E2202S 18AWG*2C BC+AL+ DRAIN(TC) JACK:NATURAL OD:4.17mm PVC	1PC	Free Issued by Customer

*[Signature]* 04-SEP-2024

RoHS COMPLIANCE

XX±1°	EM P/N:	EM-DPW2367A
X±0.5	APPROVED:	
X±0.2	CHECKED:	
XX±0.10	DRAWN:	

CUST P/N: F-001W-18P-10		CUST APPROVAL:(Y)	
MATERIAL P/N:		DATE: SEP.16.2020	
PAGE	REV.	CUST APPROVAL:(Y)	
1/1	D		