




## Heyco® Extra Dome Plugs

MOUNTING HOLE DIAMETER		PART NO.		DESCRIPTION	PART DIMENSIONS					
in.	mm.	Black	White		A Head Diameter		B Overall Height		C Inside Height	
					in.	mm.	in.	mm.	in.	mm.
<b>Multiple Locking Steps for Panel Thickness up to .250" (6,4 mm)</b>										
3.000	76,2	2442	2443	EDP 3.0	3.22	81,8	1.37	34,8	1.26	32,0
5.000	127,0	2444	2445	EDP 5.0	5.22	132,6	1.41	35,8	1.31	33,3

Standard colors black. Consult Heyco for other colors.

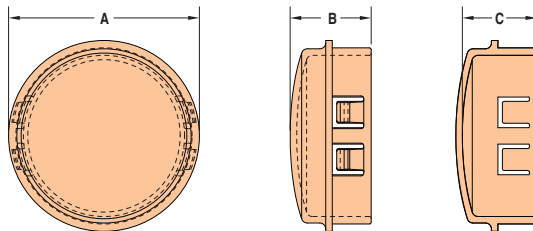


- Extra dome height for additional clearance under the top.
- Consult Heyco for additional sizes.
- Lock firmly into panels up to .250" (6,4 mm) thick.
- Locking fingers in fractional increments up to the maximum panel thickness.
- Not UL Recognized.



## Heyco® Metric Dome Plugs

MOUNTING HOLE DIAMETER		PART NO.		DESCRIPTION	PART DIMENSIONS			
mm.	in.	Black	White		A Head Diameter		B Overall Height	
					mm.	in.	mm.	in.
<b>Multiple Locking Steps for Panel Thickness up to 2,5 mm (.098")</b>								
16,0	.630	2128	2130	MDP 16	18,5	.728	10,3	.406
20,0	.787	2131	2132	MDP 20	22,6	.890		
25,0	.984	2133	2134	MDP 25	29,8	1.173		
32,0	1.260	2135	2136	MDP 32	35,3	1.388	11,5	.453

Standard color black. Consult Heyco for other colors.



- Multiple sizes for use in 16,0 mm (.630") to 32,0 mm (1.260") diameter holes. For other metric sizes, consult Heyco.
- Close unneeded panel holes.
- Quick and easy installation.
- Convex, matte finish head tapers to a thin edge.
- Lock firmly into panel up to 4,1 mm (.162") thick.
- Approximate Head Thickness: 1,6 mm (.062").
- For our complete range of Dome Plugs, see pages 6-1 thru 6-5.

Material  
Certifications

6/6 Nylon  
 Recognized under the Component Program of Underwriters' Laboratories, File E51579 (MDP's only)  
 Certified by Canadian Standards Association, File 8919 (MDP's only)

Flammability Rating

94V-2

Material Temperature Index

257°F (125°C)–Maximum temperature on part not to exceed 221°F (105°C)

Quick  
Specs