


DESCRIPTION: 2 CONDUCTOR 22 AWG TPE INSULATED CABLE,
UNSHIELDED WITH TPE JACKET
UL AWM RATED TO 105C 600 VOLTS

CONDUCTOR: 22 AWG 19 STRANDS 34 AWG TINNED ANNEALED COPPER IN ACCORDANCE
WITH ASTM B-3 AND B-8

DIELECTRIC: .030" NOMINAL WALL THICKNESS TPE TO DIAMETER OF .090"

COLOR CODE: BLUE & BROWN

CABLE ASSEMBLY:
LAY LENGTH: 2-3/4" NOMINAL LEFT HAND DIRECTION
FILLER: (2) SOLID TPE
BINDER: N/A

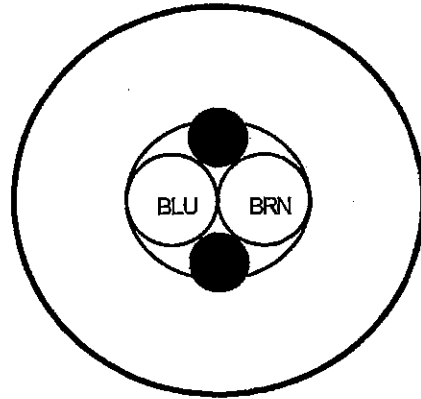

JACKET:
MATERIAL: THERMOPLASTIC TPE
COLOR: YELLOW
WALL THICKNESS: .050" NOMINAL
SEPARATOR: TISSUE UNDER JACKET BETWEEN CONDUCTORS AND JACKET
FINISHED CABLE DIAMETER: .300" NOMINAL (.290" MIN., .310" MAX)

CABLE IDENTIFICATION:
TYPE: SURFACE PRINT ON JACKET
INK COLOR: BLACK
LEGEND TO INCLUDE: UL E#, 22/2, AWM STYLE 20328 VW1, CSA LL#, AWM FT1,
105C 600V, "ALLEN BRADLEY" AND "ToughLink" LOGOS

CABLE CHARACTERISTICS:
TEMPERATURE RANGE: -30C TO +105C
VOLTAGE RATING: 600V
RoHS COMPLIANT

DATA GUIDE

CABLE CORP.

ONE ERNRIC PLACE
GARDNER, MA. 01440
978-632-0900

REV	DESCRIPTION	DATE	APP.
-	INITIAL RELEASE	8/7/09	

TITLE 22 AWG 2C TPE/TPE NO SHIELD CABLE		
SCALE	P/N 09H7-1	REV
DATE 8/09	DRN BY WJD	APP BY