

1) CONSTRUCTION:  
 CONDUCTOR: 22 AWG 7/30 STRANDED TINNED COPPER  
 INSULATION: SEMI-RIGID POLYVINYLCHLORIDE, .010" NOM. WALL THICKNESS  
 CABLE: (2) COLOR CODED SINGLES TWISTED TOGETHER WITH A LEFT HAND LAY.  
 JACKET: POLYVINYLCHLORIDE, BLACK, .032" NOM. WALL THICKNESS  
 OVERALL CABLE DIAMETER

NOM. DIA.  
 .030"  
 .050"  
 .100"  
 .164" ± .005"

2) PHYSICAL PROPERTIES:  
 TEMPERATURE RATING, MAX. 60°C & 80°C  
 TEMPERATURE RATING, MIN. -40°C (PER UL 13, COLD BEND)  
 WT./M', NOM., NET. 14.2 LBS.

3) ELECTRICAL CHARACTERISTICS:  
 CAPACITANCE, MUTUAL 26 PF/FT.  
 DIELECTRIC WITHSTANDING, MIN 1500V RMS  
 VOLTAGE RATING, MAX. 300V  
 D.C. RESISTANCE, MAX. PER ASTM B286 16.7 Ω/1000'


4) AGENCY APPROVALS:  
 NEC (UL) TYPE CM  
 UL AWM STYLE 2464  
 CSA AWM FT4


5) APPLICATION:  
 RS-232 COMPUTER INTERCONNECT, CONTROL, AND SOUND CABLE. RoHS COMPLIANT MATERIALS.

6) PRINT: (WHITE PRINT)  
 QUABBIN 7116R (UL) TYPE CM 22 AWG OR AWM 2464 -- CSA LL51726 AWM I/II A/B 80C 300V FT4 -- RoHS --  
**(LOT DESIGNATOR)**

7) COLOR CODE:  
 1. BLACK  
 2. RED

8) PACKAGING  
 TO BE PACKAGED AS PER QWC'S  
 STANDARD PACKAGING

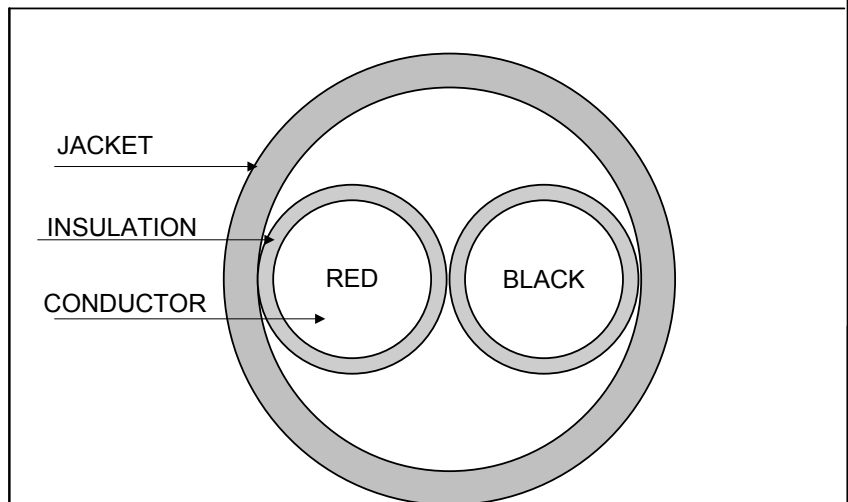

REVISION 02	DATE:	DRAWN <i>B. Duceyuski</i> 1/14/09	
REVISED BY <i>B. Duceyuski</i> 1/28/09	CHECKED <i>G. Munn</i> 01/14/09		
CHECKED <i>G. Munn</i> 01/29/09	CHECKED		
CHECKED	CUSTOMER APPROVAL:	DATE:	TITLE 2/C 22 AWG PVC/PVC CABLE -- TYPE CM, AWM 2464, CSA AWM FT4
			QUABBIN P/N 7116 1 OF 1