


CONDUCTORS - 22 AWG 7/30 TINNED ANNEALED COPPER INSULATED WITH
.010" NOMINAL WALL PVC TO A NOMINAL O.D. OF .050".

*TWO TOTAL: COLOR CODED BLACK, BROWN

ASSEMBLY - TWO CONDUCTORS ASSEMBLED WITH 1-1/2" NOMINAL LEFT HAND LAY

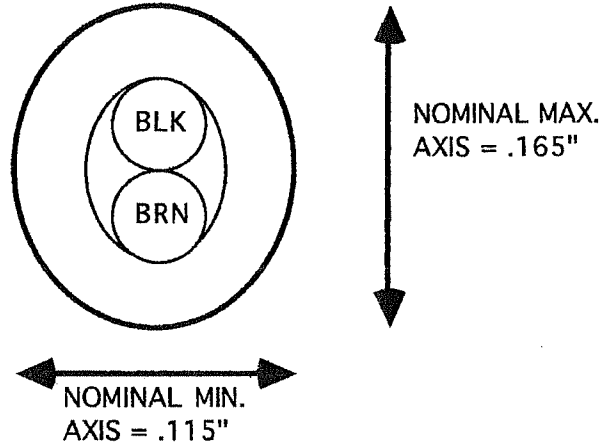

FINAL JACKET - .032" NOMINAL WALL THICKNESS GRAY PVC
**SEE DIAGRAM ABOVE FOR MIN AND MAX AXIS DIAMETERS

COMPLIANCES - SURFACE PRINTED IN BLACK INK TO THE FOLLOWING:
- UL AWM STYLE 2464, 80C 300 VOLTS

- ROHS

DATA GUIDE

CABLE CORP.

ONE ERNRIC PLACE
560 MAIN STREET
GARDNER, MA 01440
978-632-0900

TITLE
2/C 22 AWG PVC/PVC JACKET 80C 300V

SCALE N/A P/N 06G28-1 REV

DATE 7/06 DRN. BY WJD APP. BY

REV.	DESCRIPTION	DATE	APP.
0	FIRST ISSUE	7/31/06	