

DGC DATA GUIDE CABLE

Electronic and Electrical Wire & Cable Products

232 Sherman Street Gardner, MA 01440
 Phone: 978-632-0900 Fax: 978-630-1872
 Visit us on our website; www.dataguidecable.com

**2 CONDUCTORS – 22 AWG
 AWM RATED 90C 1000 VOLTS**

CONDUCTORS:

- 22 AWG 7/30 TC with .015" Wall Thickness 90C Polyester Elastomer to a Nominal O.D. of .060" +/- .002"
- 2 Conductors Total
- Color Coded as Indicated
- Cable Twist with Minimum of 1 Twist per 3 Inches

BINDER:


- .001" Thickness Polyester

JACKET:

- .032" Nominal Wall Thickness (**Gray) 90C PVC to .187" Nominal Diameter
- ** Jacket must be Loose Enough to Slide 4" off easily by Hand

CABLE CHARACTERISTICS:

- ** Cable Weight: 16lbs/1000'
- Capacitance (C to C): 26pf/ft
- Impedance: 93 OHMS Nominal
- Current Carrying Capacity: 2 AMPS

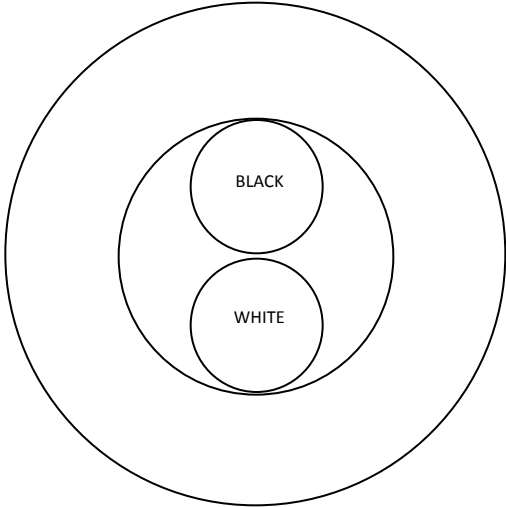

COLOR CODE

CONDUCTOR #	COLOR
1	BLACK
2	WHITE

Agency Approval

- UL AWM 10258/20886 90C 1000V
- CSA AWM 90C 1000V
- CE
- RoHS COMPLIANT

REVISION HISTORY

REV #	DATE	BY	DESCRIPTION
0	10/25/10	WD	FIRST ISSUE
1	10/28/10	WD	ADD CABLE TWIST
2	9/5/12	WD	NEW SPEC FORMAT

Customer Number	
D.G. Part Number	10K15-7
Prepared By:	KAM
Reviewed By:	WJD