

1) CONSTRUCTION:

CONDUCTOR: 22 AWG 7/30 STRANDED TINNED COPPER	NOM. DIA.
INSULATION: SEMI-RIGID POLYVINYLCHLORIDE, .010" NOM. WALL THICKNESS	.030"
CABLE: (2) COLOR CODED SINGLES TWISTED TOGETHER WITH A LEFT HAND LAY.	.050"
JACKET: POLYVINYLCHLORIDE, CHROME GRAY, .032" NOM. WALL THICKNESS	.100"
OVERALL CABLE DIAMETER	.164" ±.005"

2) PHYSICAL PROPERTIES:

TEMPERATURE RATING, MAX.	60°C & 80°C
TEMPERATURE RATING, MIN.	-40°C (PER UL 13, COLD BEND)
WT./M', NOM., NET.	14.2 LBS.

3) ELECTRICAL CHARACTERISTICS:

CAPACITANCE, MUTUAL	26 PF/FT.
DIELECTRIC WITHSTANDING, MIN	1500V RMS
VOLTAGE RATING, MAX.	300V
D.C. RESISTANCE, MAX. PER ASTM B286	16.7 Ω/1000'

4) AGENCY APPROVALS:


- NEC (UL) TYPE CM
- UL AWM STYLE 2464
- CSA AWM FT4

5) APPLICATION:
RS-232 COMPUTER INTERCONNECT, CONTROL, AND SOUND CABLE. RoHS COMPLIANT MATERIALS.

6) PRINT:
QUABBIN 7115R (UL) TYPE CM 22 AWG OR AWM 2464 -- CSA LL51726 AWM I/II A/B 80C 300V FT4 -- RoHS --
(LOT DESIGNATOR)

7) COLOR CODE:
1. BLACK
2. RED

8) PACKAGING
TO BE PACKAGED AS PER QWC'S
STANDARD PACKAGING

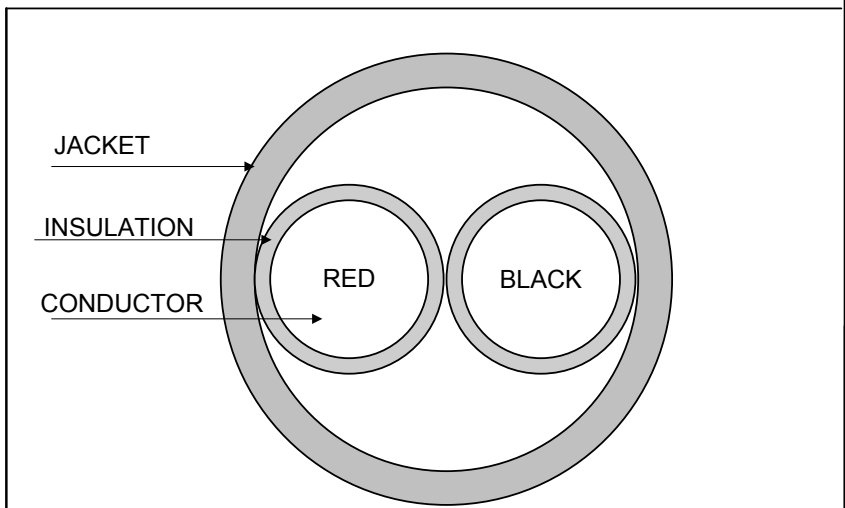

REVISION 06	DATE:	DRAWN J. RIVERNIDER 02/10/95	
REVISED BY	<i>B. Duczynski</i> 1/28/09	CHECKED G. MELNIK 02/10/95	
CHECKED	<i>G. MUMFORD</i> 01/29/09	CHECKED	
CHECKED		CUSTOMER APPROVAL: DATE:	
			TITLE 2/C 22 AWG PVC/PVC CABLE -- TYPE CM, AWM 2464, CSA AWM FT4
			QUABBIN P/N 7115 1 OF 1