

1) CONSTRUCTION: NOM. DIA.
 CONDUCTOR: 22 AWG 7/30 STRANDED TINNED COPPER .030"
 INSULATION: LEAD FREE SEMI-RIGID POLYVINYLCHLORIDE, .010" NOM. WALL THICKNESS .050"
 CABLE: (2) COLOR CODED SINGLES TWISTED TO FORM A CABLE CORE. .100"
 JACKET: LEAD FREE POLYVINYLCHLORIDE, WHITE, .032" NOM. WALL THICKNESS .164"
 OVERALL CABLE DIAMETER

2) PHYSICAL PROPERTIES:
 TEMPERATURE RATING, MAX. 60°C & 80°C
 WT./M', NOM., NET. 14.3 LBS.

3) ELECTRICAL CHARACTERISTICS:
 CAPACITANCE, MUTUAL 27 PF/FT.
 DIELECTRIC WITHSTANDING, MIN 1500V RMS
 VOLTAGE RATING, MAX. 300V
 D.C. RESISTANCE, MAX. PER ASTM B286 16.7 OHMS


4) AGENCY APPROVALS:
 NEC (UL) TYPE CM
 UL AWM STYLE 2464 80C 300V
 CSA AWM FT4

5) APPLICATION:
 RoHS COMPLIANT.

6) PRINT:
 E118830 (UL) TYPE CM 22 AWG OR AWM 2464 -- CSA LL51726 AWM I/II A/B 80C 300V FT4 -- RoHS --
(LOT DESIGNATOR)

7) COLOR CODE:
 1. BLACK
 2. RED

8) PACKAGING:
 TO BE PACKAGED AS PER QWC'S STANDARD PACKAGING

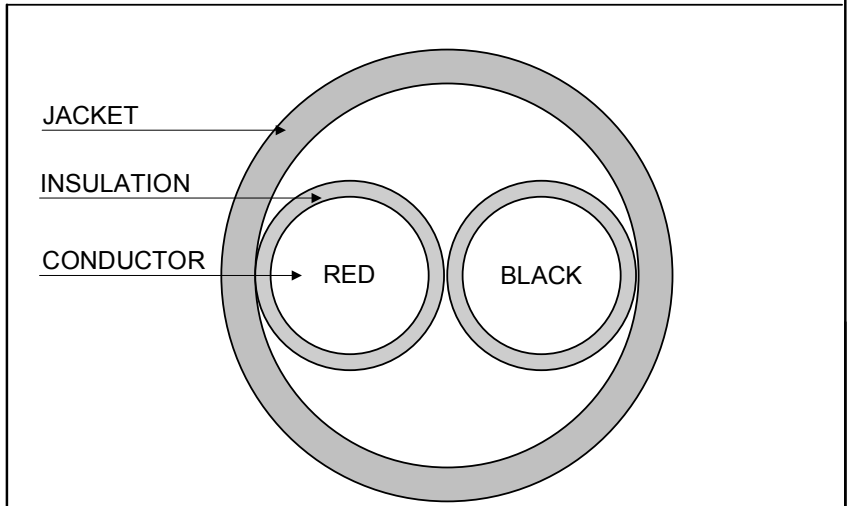

REVISION 04	DATE:	DRAWN J. RIVERNIDER 11/10/94	
REVISED BY	B. M. DUCZYNSKI 2/24/05	CHECKED G. MELNIK 11/11/94	
CHECKED	G. MELNIK 2/24/05	CHECKED	
CHECKED		CUSTOMER APPROVAL: DATE:	TITLE 2/C 22 AWG PVC/PVC CABLE -- TYPE CM, STYLE 2464, CSA AWM FT4
			QUABBIN P/N 02069 1 OF 1