

1) CONSTRUCTION:

CONDUCTOR:	22 AWG 7/30 STRANDED TINNED COPPER	NOM. DIA.	.030"
INSULATION:	POLYVINYLCHLORIDE, .010" NOM. WALL THICKNESS		.050"
CABLE:	(2) COLOR CODED SINGLES TWISTED TOGETHER TO FORM A CABLE CORE.		.100"
JACKET:	POLYVINYLCHLORIDE, BEIGE (QUABBIN'S #156 STARLIGHT BEIGE 1 TO 1/2%), .032" NOM. WALL THICKNESS		
	OVERALL CABLE DIAMETER		.164"

2) PHYSICAL PROPERTIES:

TEMPERATURE RATING, MAX.	60°C & 80°C
WT./M', NOM., NET.	14.3 LBS.

3) ELECTRICAL CHARACTERISTICS:

CAPACITANCE, MUTUAL	27 PF/FT.
DIELECTRIC WITHSTANDING, MIN	1500V RMS
VOLTAGE RATING, MAX.	300V
D.C. RESISTANCE, MAX. PER ASTM B286	16.7 Ω/1000 FT

4) AGENCY APPROVALS:

- NEC (UL) TYPE CM
- UL AWM STYLE 2464
- CSA AWM FT4

5) APPLICATION:

RoHS COMPLIANT MATERIALS.

6) PRINT:


E118830 (UL) TYPE CM 22 AWG OR AWM 2464 -- CSA LL51726 AWM I/II A/B 80C 300V FT4 -- RoHS --  
**(LOT DESIGNATOR)**

7) COLOR CODE:

- 1. BROWN
- 2. WHITE

8) PACKAGING:

TO BE PACKAGED AS PER QWC'S STANDARD PACKAGING

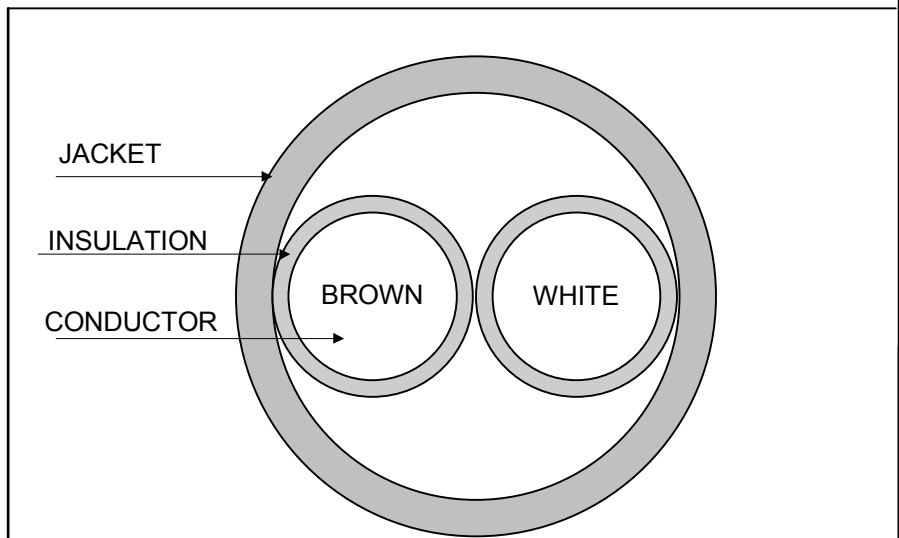

REVISION 05	DATE:	DRAWN S. ADDIE 06/02/97	
REVISED BY B. Duceyuski 2/8/07	CHECKED G. MELNIK 06/02/97		
CHECKED B. Duceyuski 2/8/07	CHECKED		
CHECKED	CUSTOMER APPROVAL: DATE:	TITLE 2/C 22 AWG PVC/PVC CABLE -- TYPE CM. STYLE 2464. CSA AWM FT4	
		QUABBIN P/N 02136	1 OF 1