


**CONDUCTORS**

- 22 AWG (7x30) TINNED PLATED COPPER INSULATED WITH .008" THICKNESS POLYPROPYLENE TO A NOMINAL O.D. OF .046".
- 2 CONDUCTOR TOTAL COLOR CODED AS FOLLOWS:  
A1: BLACK, A2, RED

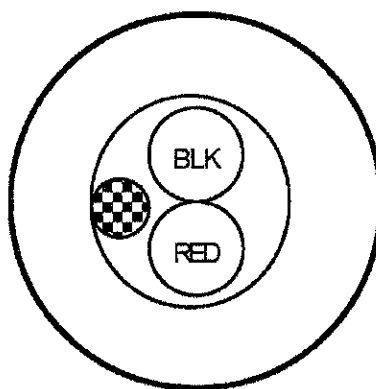

**NOTES**

- 1" LEFT HAND DIRECTION CABLE LAY
- OVERALL ALUMINUM/POLYESTER TAPE SHIELD, FOIL FACING INWARD
- 22 AWG 7/30 TINNED CU DRAIN UNDER TAPE SHIELD
- OVERALL .020" WALL BLACK PVC JACKET TO .134" NOMINAL FINAL DIAMETER
- .140" MAXIMUM FINAL CABLE DIAMETER
  
- RoHS COMPLIANT
  
- \*\*- 300V RMS WORKING VOLTAGE
- \*\*- 75C OPERATING TEMP
- \*\*- DIELECTRIC WITHSTAND: .5KVAC MINIMUM 2 SECONDS
- \*\*- NO AGENCY APPROVALS

**DATA GUIDE CABLE CORP.**

232 SHERMAN STREET  
GARDNER, MA, 01440  
978-632-0900

REV	DESCRIPTION	DATE	APP.
2	**TAMMY CHART REQUEST	5/23/11	
1	FORMAT UPDATE	4/29/11	
0	FIRST ISSUE	5/21/86	

<b>DATA GUIDE CABLE CORP.</b> 232 SHERMAN STREET GARDNER, MA, 01440 978-632-0900			
TITLE 2 CONDUCTOR DATA CABLE			
SCALE N/A	P/N 84E2-6	REV	
DATE 5/86	DRN. BY WJD	APP. BY	