GeneralCable
TWO CONDUCTOR #22AWG SHIELDED CABLE

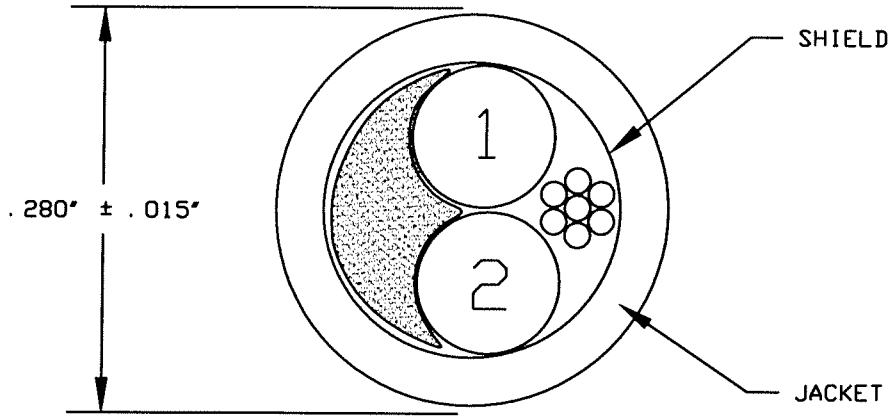

COMPONENT I - PRIMARY
(ITEMS 1-2)
CONDUCTOR: #22AWG 19/34 TINNED COPPER
INSULATION: XLPE-.031" NOMINAL WALL
DIAMETER: .092" NOMINAL

FILLER - AS REQUIRED TO MAINTAIN A CIRCULAR CABLE CROSS-SECTION

DRAIN WIRE - #20AWG 7/28 TINNED COPPER

CABLE - CORE: TWO (2) COMPONENT I (ITEMS 1-2) + ONE (1) DRAIN WIRE + ONE (1) FILLER CABLED TOGETHER WITH A L.H. LAY

SHIELD - .0015" ALUMINUM/MYLAR TAPE-25% MINIMUM OVERLAP

JACKET - XLPE (GRAY)-.047" NOMINAL WALL

DIAMETER - .280" ± .015"

NET CABLE WGT- 39 LBS./1000'

UL - AWM STYLE 4313 125°C 600V

CSA - AWM IIA 125°C 600V

JACKET PRINT: "68A9385P222 GENERAL CABLE BRAND REX BRAND (WC) ℞ AWM STYLE 4313/CSA AWM IIA 125C 600V XLPE FT1/ROHS COMPLIANT DAY/MONTH/YEAR"

COLOR CODE -

ITEM NUMBER	COLOR
1	BLACK
2	WHITE

REVISIONS

0	01/16/08	FIRST ISSUE

REFERENCES

IEWC/GE #68A9385P222GY
GeneralCable P/N TBD

GeneralCable
1600 West Main Street, Willimantic, CT 06226-1128
The Power Of One

DRAWING NO: 12-1756

DRAWN BY: CAD | APPROVED BY: M. LAJEUNESSE

THIS DRAWING IS THE PROPERTY OF GeneralCable COMPANY AND SHALL NOT BE REPRODUCED, COPIED, OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF THIS DESIGN WITHOUT THE PERMISSION OF GeneralCable COMPANY