

Thermax

Scope: This drawing defines the physical and electrical characteristics of a custom cable assembly.

Thermax - East
 19-02 Whitestone Expressway
 Whitestone, NY 11357
 (800) 761-7800
 Fax (718) 746-4190

Thermax - West
 25600 Rye Canyon Road
 Valencia, CA 91355
 (800) 423-5873
 Fax (661) 295-3101

58893

Construction Details

Construction Details	Diameter [Nom]
22 AWG Pair	
Conductor	0.0295"
Insulation	0.073"
Binder	0.148"

Final Assembly

Cable	One twisted pair and one 22 AWG 19x34 tin plated copper drain wire cabled together	0.151"
Shield	Aluminum/Polyester Tape	0.171"
Jacket	Extruded ETFE	

Identification


Colors	Red & White/Black
Pair #1	Black
Outer Jacket	

Properties

Weight	TBD
Temperature Rating	-55°C to 150°C
Voltage Rating	1000 V

Notes

- This cable is compliant with RoHS Directive 2002/95/EC.

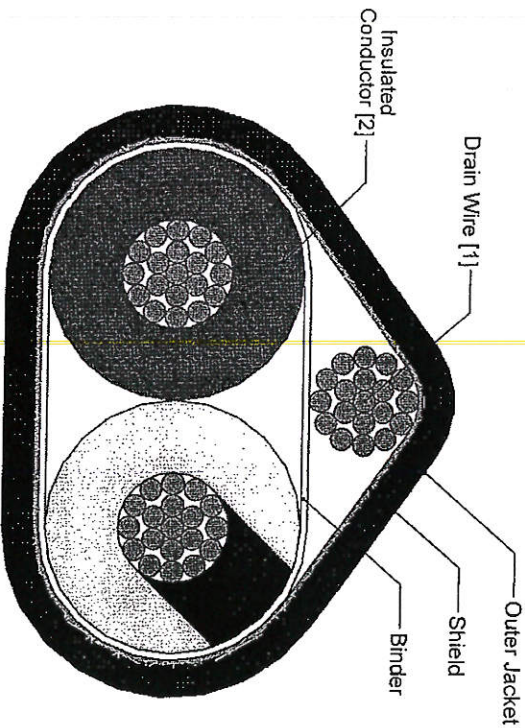

The information contained in this drawing is proprietary property of Thermax. It may not be reproduced, in whole or in part, without written authorization from Thermax.

Cage Code
12814

Product Specification
22-AF2XT-1934(2)AMDCF

Prepared By
IGP

Date
03-12-13

Page
1 of 1

NON CONTROLLED COPY

Revisions			
Rev	Description	Date	Approved
--	Initial Release	03-12-13	TO