



DESC: 22/3 CABLE 105C (-40C) 300V		UNITS: IN	SCALE: 16:1	ITEM	SPECIFICATIONS
CUSTOMER: 10:10	NWI P/N: FCAB223-044	DWG NO: 48175-2		A.	22 GAUGE 7x.0096TC CONCENTRIC
CUST. P/N: TBD	DRAWN: DP LANGER	DATE: 3/6/2014	REV: C	B.	15 MIL TPE INSULATION 105C 300V 13 MIL MIN. TPE INSULATION O.D. .062 ± .002"

CORE DIMENSIONS FOR INTERNAL USE ONLY

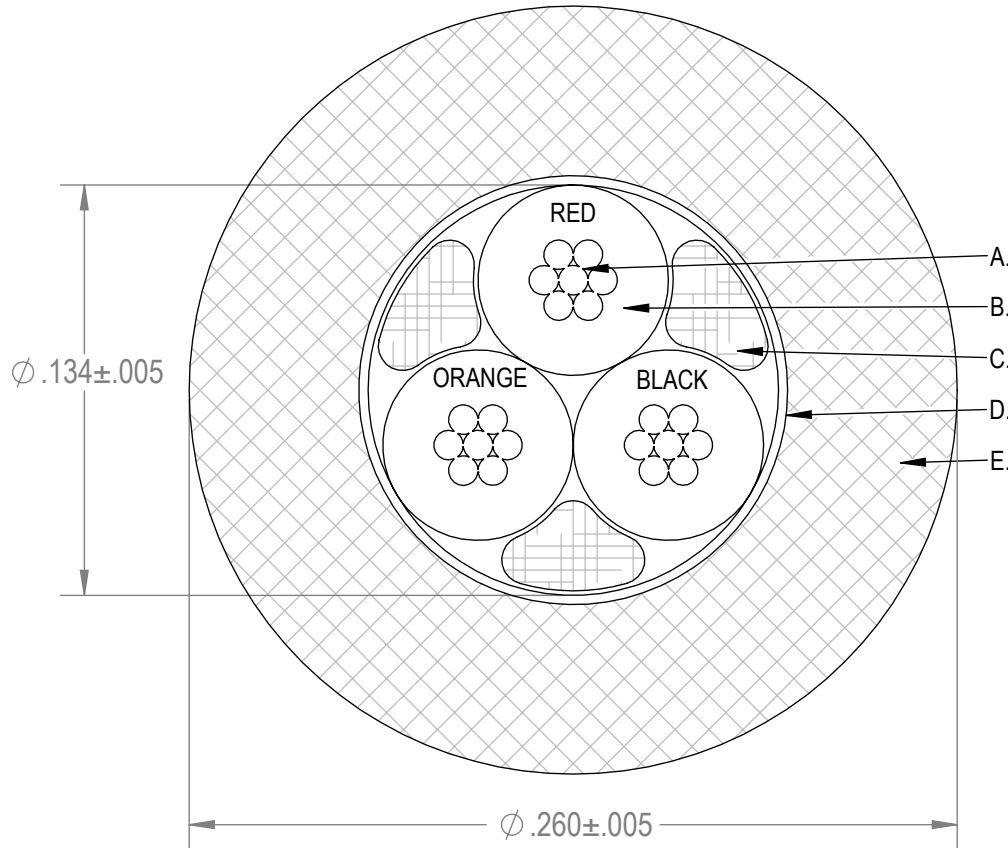

A.	22 GAUGE 7x.0096TC CONCENTRIC
B.	15 MIL TPE INSULATION 105C 300V 13 MIL MIN. TPE INSULATION O.D. .062 ± .002"
C.	POLY FILLER
D.	TISSUE PAPER SEPARATOR
E.	50 MIL PRESSURED TPE JACKET 105C 300V 40 MIL MIN. TPE JACKET BLACK JACKET NO AGENCY APPROVALS
ROHS COMPLIANT MATERIALS TO EU DIRECTIVE 2011/65/EU	



ISOMETRIC VIEW FOR REFERENCE ONLY

LEGEND SPECIFICATIONS NO LEGEND ON JACKET



This document contains proprietary and confidential information of Northwire, Inc. (and its subsidiary) and shall not be used, disclosed or reproduced, in whole or in part, for any purpose without the prior written consent of Northwire, Inc. (and its subsidiary).

Disclaimer: The technical data that is made part of this document may be subject to the International Traffic in Arms Regulation (ITAR) and the Export Administration Regulations (EAR). Disclosure of technical data to Foreign Persons in the course of employment with U.S. contractors is considered an export and is subject to the ITAR and EAR export licensing requirements/regulations.

DESC: 22/3 CABLE 105C (-40C) 300V

UNITS: IN

SCALE: 60:1

ELECTRICAL REQUIREMENTS

CUSTOMER: 10:10

NWI P/N: FCAB223-044

DWG NO: 48175-2

NONE SPECIFIED

CUST. P/N: TBD

DRAWN: DP LANGER

DATE: 3/6/2014

REV: C



MECHANICAL REQUIREMENTS

NONE SPECIFIED

FINISHED O.D. WAS .250	C	3/25/15	DPL
FINISHED O.D. WAS .274; JACKET WALL CHANGED ACCORDINGLY; WAS GREEN CONDUCTOR	B	3/10/14	DPL
INITIAL RELEASE	A	3/6/14	DPL
REVISION RECORD	REV.	REV DATE	APR
REVISIONS			