



DESC: 22/3 CABLE 80C 150V

SCALE: 30x DATE: 2/20/13 DR. BY: DPL

CUSTOMER: IEWC

DWG NO: 42805A-1

NWI P/N: SEE BELOW

CUSTOMER P/N: T.B.D.

ITEM SPECS.

A. 22 GAUGE 168x44BC ROPE LAY
7x24x44 CONSTRUCTION


B. 9 MIL PVC INSULATION PER UL AWM 1568
7 MIL MIN. PVC INSULATION
O.D. .052±.002"

C. 30 MIL PRESSURED PVC JACKET 80C 150V
24 MIL MIN. PVC JACKET GRAY JACKET
NO AGENCY APPROVALS

TALC POWDER USED AS SEPARATOR

This document contains proprietary and confidential information of Northwire, Inc. (and its subsidiary) and shall not be used, disclosed or reproduced, in whole or in part, for any purpose without the prior written consent of Northwire, Inc. (and its subsidiary).

Disclaimer: The technical data that is made part of this document may be subject to the International Traffic in Arms Regulation (ITAR) and the Export Administration Regulations (EAR). Disclosure of technical data to Foreign Persons in the course of employment with U.S. contractors is considered an export and is subject to the ITAR and EAR export licensing requirements/regulations.

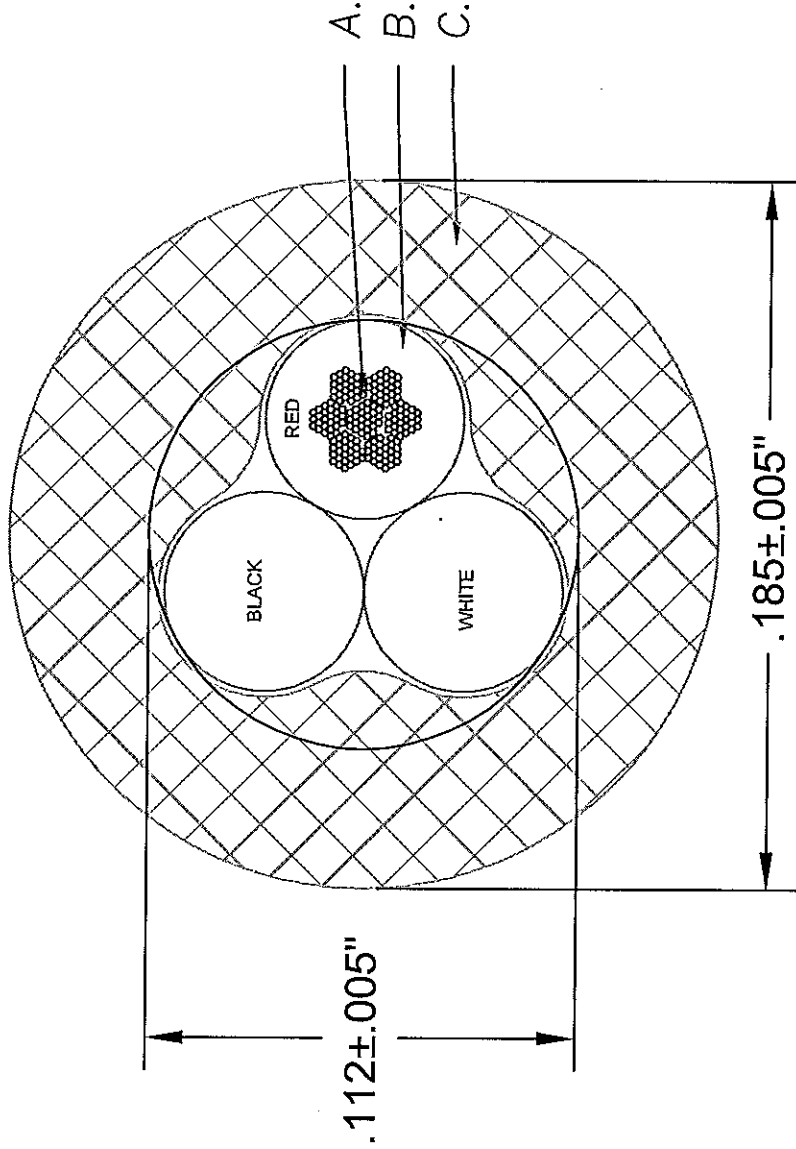

ELECTRICAL REQUIREMENTS:
NONE SPECIFIED

MECHANICAL REQUIREMENTS:
NONE SPECIFIED

CORE DIMENSIONS FOR INTERNAL USE ONLY

Handwritten notes:

2-12-13

MEETS WITHS APPROVAL

ENGINEERS

TVA ENGINEERS

REQ. NORTHWIRE

ENGINEERS

OSCEOLA PART NO: FCAB223-040
SANTA TERESA PART NO: FCAB223-040N

INITIAL RELEASE

REVISION RECORD

A 2/20/13

DPL

REV DATE APR 1

APR 2

QA R