

1) CONSTRUCTION:

CONDUCTOR:	22 AWG 7/30 STRANDED TINNED COPPER	NOM. DIA.	.030"
INSULATION:	SEMI RIGID POLYVINYLCHLORIDE, .010" NOM. WALL THICKNESS		.050"
CABLE:	(3) INSULATED CONDUCTORS TWISTED TOGETHER TO FORM A CABLE CORE		.108"
JACKET:	POLYVINYLCHLORIDE, CHROME GRAY, .032" NOM. WALL THICKNESS	OVERALL CABLE DIAMETER	.172"

2) PHYSICAL PROPERTIES:

TEMPERATURE RATING, MAX.	60°C & 80°C
TEMPERATURE RATING, MIN.	-20°C
WT./M', NOM., NET.	17.9 LBS.

3) ELECTRICAL CHARACTERISTICS:

CAPACITANCE, MUTUAL	27.0 PF/FT.
DIELECTRIC WITHSTANDING, MIN	1500V RMS
VOLTAGE RATING, MAX.	300V
D.C. RESISTANCE, MAX. PER ASTM B286	16.7 Ω/1000'


4) AGENCY APPROVALS:  
 NEC (UL) TYPE CM  
 CSA AWM FT4  
 (UL) AWM STYLE 2464

5) APPLICATION:  
 RS232 COMPUTER INTERCONNECT, CONTROL AND SOUND CABLE. RoHS COMPLIANT MATERIALS.

6) PRINT:  
 QUABBIN 7120R (UL) TYPE CM 22 AWG OR AWM 2464 -- CSA LL51726 AWM I/II A/B 80C 300V FT4 -- RoHS --  
**(LOT DESIGNATORS)**

7) COLOR CODE:  
 1. BLACK  
 2. RED  
 3. WHITE

8) PACKAGING:  
 TO BE PACKAGED AS PER QWC'S  
 STANDARD PACKAGING

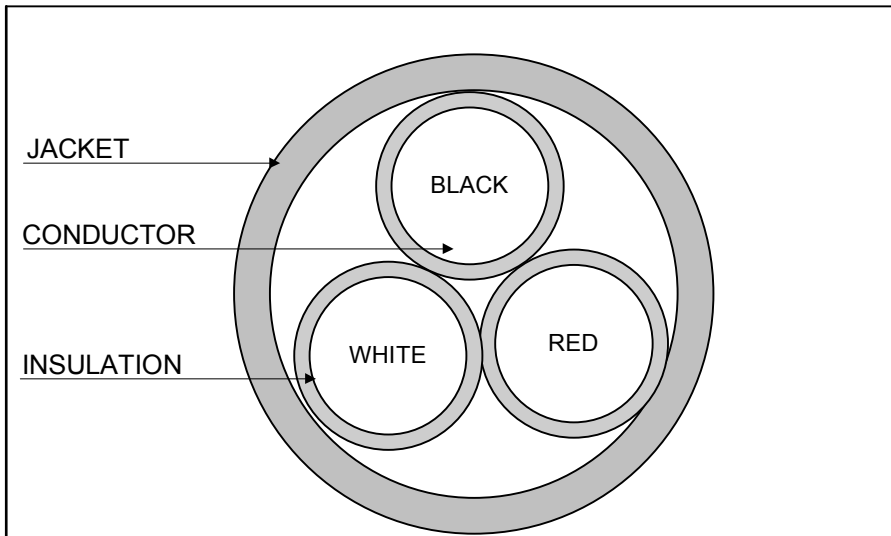

REVISION 06	DATE:	DRAWN S. ADDIE 09/21/95	
REVISED BY	<i>B. Duceyuski</i> 6/3/08	CHECKED J. RIVERNIDER 09/21/95	
CHECKED	<i>G. Munn</i> 6/04/08	CHECKED M. FERRERO 09/22/95	
CHECKED		CUSTOMER APPROVAL: DATE:	TITLE
			3/C 22 AWG PVC/PVC CABLE – TYPE CM, STYLE 2464, CSA AWM FT4
			QUABBIN P/N 7120 1 OF 1