


03111

- 1) CONSTRUCTION:
 - CONDUCTOR: 22 AWG 7/30 STRANDED TINNED COPPER
 - INSULATION: SEMI-RIGID POLYVINYLCHLORIDE, .010" NOM. WALL THICKNESS
 - CABLE: (3) INSULATED CONDUCTORS TWISTED TOGETHER TO FORM A CABLE CORE
 - JACKET: POLYVINYLCHLORIDE, CHROME GRAY, .032" NOM. WALL THICKNESS
- 2) PHYSICAL PROPERTIES:
 - TEMPERATURE RATING, MAX. 60°C & 80°C
 - TEMPERATURE RATING, MIN. -20°C
 - WT./M, NOM., NET. 17.1 LBS.
- 3) ELECTRICAL CHARACTERISTICS:
 - CAPACITANCE, MUTUAL, NOM. 26.0 PF/FT.
 - DIELECTRIC WITHSTANDING, MIN. 2000V RMS
 - VOLTAGE RATING, MAX. 300V
 - D.C. RESISTANCE, MAX. PER ASTM B286 16.7 Ω/1,000'
- 4) AGENCY APPROVALS:
 - UL AWM STYLE 2464
 - NEC (UL) TYPE CM
 - CSA AWM FT4
- 5) APPLICATION:
 - RS232 COMPUTER INTERCONNECT, CONTROL AND SOUND CABLE. ROHS COMPLIANT MATERIALS.
- 6) PRINT:
 - QUABBIN P/N 03111 (UL) TYPE CM 22 AWG OR AWM 2464 -- CSA LL51726 AWM I/II A/B 80C 300V FT4 --
 - RoHS -- (LOT DESIGNATOR)
- 7) COLOR CODE:
 - 1. WHITE
 - 2. GREEN
 - 3. BROWN
- 8) PACKAGING:
 - TO BE PACKAGED AS PER QWC'S
 - STANDARD PACKAGING

NOM. DIA.
 .030"
 .050"
 .108"
 .172"

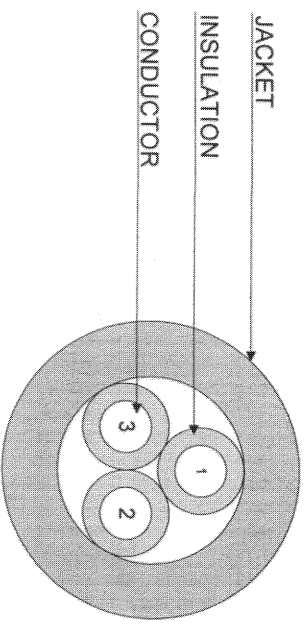

Created 10/15/13	BMD 10/15/13	
REV. 01	GM 10/15/13	
TITLE		
3/C 22 AWG PVC/PVC CABLE --		
STYLE 2464, TYPE CM, CSA AWM FT4		
QUABBIN P/N	03111	
		1 of 1

Lucretia Orummes
 CUSTOMER APPROVAL: *[Signature]*

BT Technologies Corp

DATE:

10/17/13