


CONDUCTORS - 22 AWG (7x30) TINNED ANNEALED COPPER INSULATED WITH .010" NOMINAL WALL OF S-R PVC TO A NOMINAL O.D. OF .050".

FOIL SHIELD

ALUMINUM/POLYESTER TAPE, FOIL FACING OUTWARD

DRAIN

24 AWG 7/32 TC OVER FOIL SHIELD

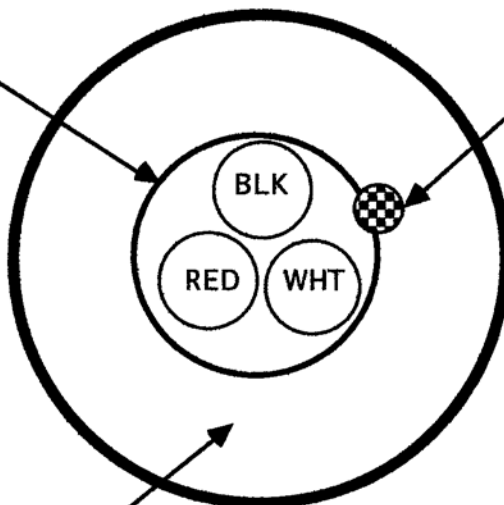

JACKET - .032" NOMINAL WALL OF CHROME GRAY PVC TO A NOMINAL O.D. OF .175"

CABLE IS SURFACE PRINTED IN BLACK INK AS FOLLOWS:
 "E123820 #22 (UL) TYPE CM 75C ALSO AWM 2464 -- LL91737 CSA TYPE CMG"

LISTINGS

UL CM 75C
 UL AWM 2464 80C 300V
 CSA TYPE CMG

DATA GUIDE CABLE CORP.

ONE ERNRIC PLACE
 GARDNER, MA, 01440
 978-632-0900

| REV. | DESCRIPTION | DATE | APP. |
|------|-------------|----------|------|
| | | | |
| | | | |
| | | | |
| 0 | FIRST ISSUE | 11/13/06 | |

| | | |
|--|----------------|---------|
| TITLE 3 CONDUCTOR 22 AWG CABLE SHIELDED(128046) | | |
| SCALE N/A | P/N 02A25-3 | REV |
| DATE 11/06 | DRN. BY WJD | APP. BY |