


- 1) CONSTRUCTION:
- | | |
|---|-----------|
| CONDUCTOR: 22 AWG 7/30 STRANDED TINNED COPPER | NOM. DIA. |
| INSULATION: POLYVINYLCHLORIDE .010" NOM. WALL THICKNESS | .030" |
| CABLE: (4) INSULATED CONDUCTORS TWISTED TOGETHER WITH A 2" LAY TO FORM A CABLE CORE | .050" |
| JACKET: POLYVINYLCHLORIDE, BLACK, .032" NOM. WALL THICKNESS | .121" |
| OVERALL CABLE DIAMETER | .185" |
- 2) PHYSICAL PROPERTIES:
- | | |
|--------------------------|-------------|
| TEMPERATURE RATING, MAX. | 60°C & 80°C |
| WT./M', NOM., NET. | 21.3 LBS. |
- 3) ELECTRICAL CHARACTERISTICS:
- | | |
|-------------------------------------|--------------|
| CAPACITANCE, MUTUAL | 25 PF/FT |
| DIELECTRIC WITHSTANDING, MIN | 1500V RMS |
| VOLTAGE RATING, MAX. | 300V |
| D.C. RESISTANCE, MAX. PER ASTM B286 | 16.7 Ω/1000' |
- 4) AGENCY APPROVALS:
- NEC TYPE (UL) CM
 - UL AWM STYLE 2464
 - CSA AWM FT4
- 5) APPLICATION:
- RoHS COMPLIANT MATERIALS.
- 6) PRINT:
- QUABBIN P/N 04375 (UL) TYPE CM 22 AWG OR AWM 2464 -- CSA LL51726 AWM I/II A/B 80C 300V FT4 -- RoHS -- **(LOT DESIGNATOR)**
- 7) COLOR CODE:
- 1. BLACK
 - 2. RED
 - 3. WHITE
 - 4. GREEN

8) PACKAGING:
TO BE PACKAGED AS PER QWC'S
STANDARD PACKAGING

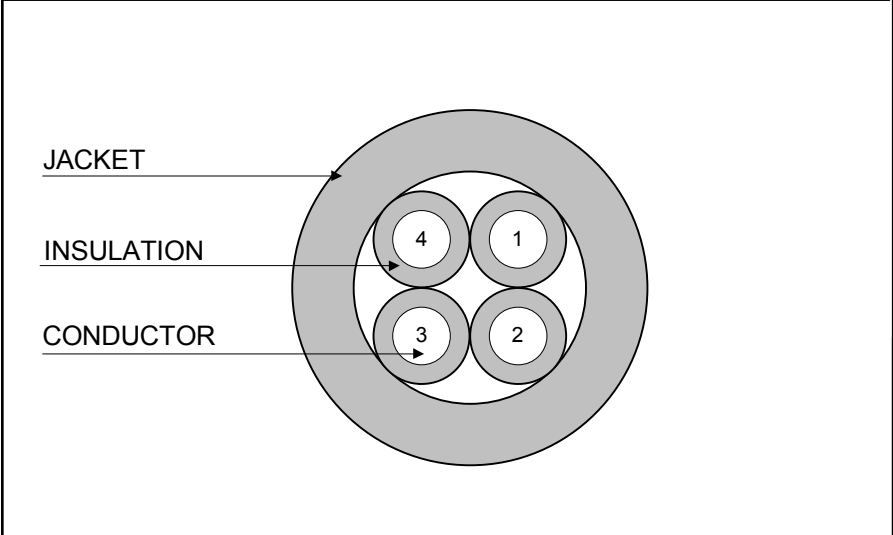

REVISION 01	DATE:	DRAWN <i>B. Duczynski</i> 1/11/08	
REVISED BY		CHECKED <i>J. Kucmider</i> 1/11/08	
CHECKED		CHECKED	
CHECKED		CUSTOMER APPROVAL: DATE:	TITLE 4/C 22 AWG PVC/PVC CABLE -- TYPE CM, STYLE 2464, CSA AWM FT4
			QUABBIN P/N 04375 1 OF 1