


RESTRICTED

contains Northwire, Inc. proprietary data, and is not to be copied, reproduced, used or divulged to persons, in whole or in part, without proper authorization in writing from Northwire, Inc. is the property of Northwire, Inc. which reserves all rights to it.

DESC: 22/4 AWM 2517 105°C 300V	DWG NO: 2204A033
SCALE: 25x	DATE: 2/25/00
CUSTOMER: INDUSTRIAL ELECTRIC	DR. BY: DP LANGER
CUSTOMER P/N: 2204C-4NWG	NWI NO: FAWM224-069

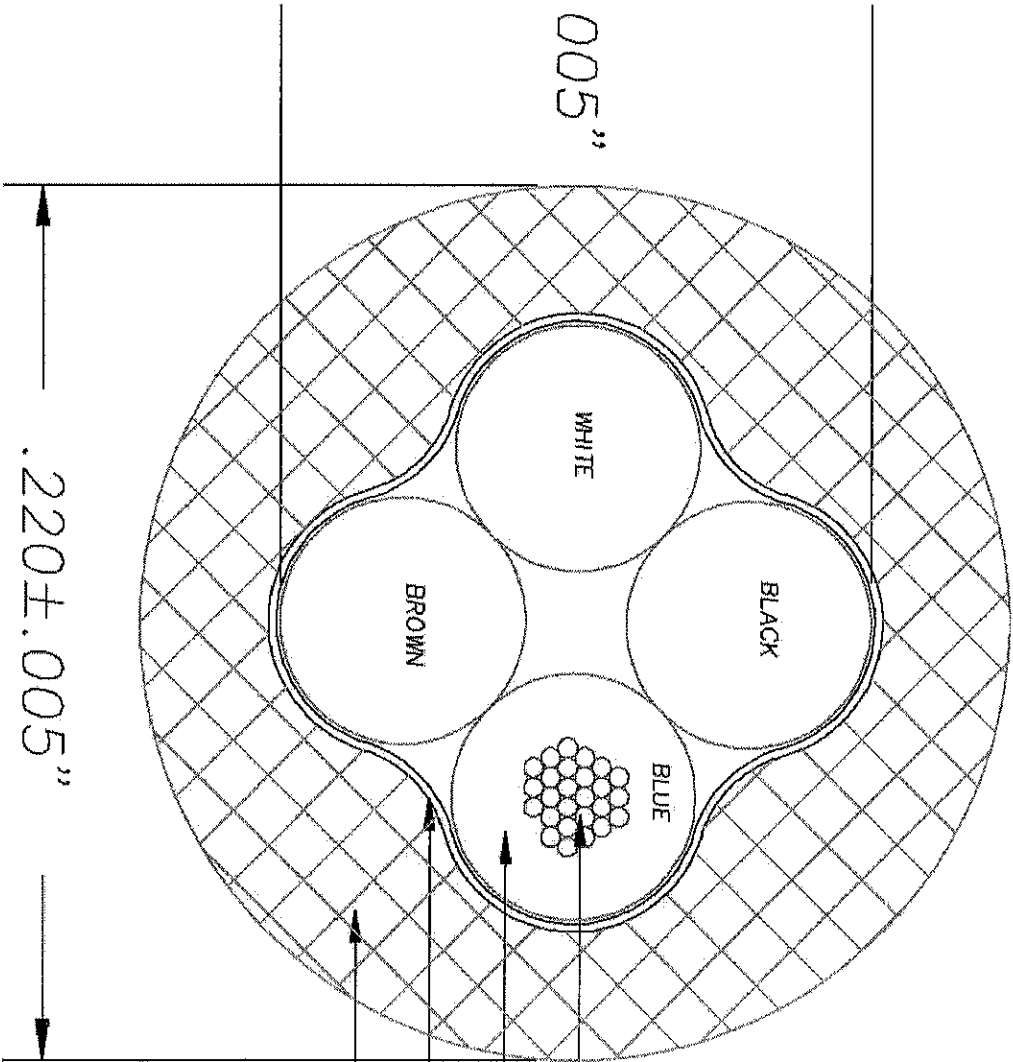

- A.
- B.
- C.
- D.

ITEM	SPECS.
A.	22 GAUGE 26x36BC BUNCHED
B.	15 MILS PVC INSULATION 105°C 300V 13 MILS MIN. PVC INSULATION O.D. .062±.002" AWM STYLE 1569
C.	TISSUE PAPER SEPARATOR
D.	30 MILS PRESSURED PVC JACKET 105°C 24 MILS MIN. PVC JACKET YELLOW UL AND CSA APPROVED
	UV, WATER AND OIL RESISTANT

ELECTRICAL REQUIREMENT
NONE SPECIFIED

MECHANICAL REQUIREMENT
NONE SPECIFIED

CORE DIMENSION FOR INTERNAL USE

ADDED UV, H2O, OIL RES COMMENT	C	6/9/11	DF
CHANGED CUSTOMER PART NUMBER	B	5/30/03	DF
INITIAL RELEASE	A	2/25/00	DF
REVISION RECORD	REV	REV DATE	APPR