

Hueson Wire
 38 Sutton Street
 Northbridge, MA 01534
 508-234-6372
 www.huesonwire.com

Specification

Issue Date: 8/1/2014
 Issue: 1

Construction


Description:	5/C 22 7/30 TC SRPVC/PVC (UL) 2464		Diam. (In)
Component:	5 Conductors		
Conductor:	22 AWG 7/30 Tinned Copper to ASTM-B33		0.03"
Insulation:	0.009" SR PVC		0.048"
Color Code:	2C Blue + 2 Cond Black + 1 Cond Green		
Cable Assembly:	Bunch Cable 5 Conductors		0.135"
Fillers	Fibrillated Polypropylene center filler for roundness		0.135"
Jacket:	0.030" AWM Jacket Compound		0.200"
Jacket Color:	GRAY		0.200"
Print:	E174416 (RU) AWM 2464 80C 300V VW-1 - cRU AWM IA 80C 300V FT-1		
Specifications:			
UL	2464		80°C
Canadian cUL	AWM		300V
Environmental Compliance			
EU Directive 2002/95/EC(RoHS): All materials used in the manufacture of this part are in compliance with EU Directive 2002/95/EU regarding the restriction of use of certain hazardous substances in electrical and electronic equipment.			
REACH Regulation (EC 1907/2006): This product does not contain Substances of Very High Concern (SVHC) listed on the European Union's REACH candidate list in excess of 0.1% mass of the item.			
California Prop 65: The outer surface materials used in the manufacture of this part meet the requirements of California Prop. 65.			



Hueson Wire
38 Sutton Street
Northbridge, MA 01534
508-234-6372
www.huesonwire.com

Issue Date: 8/1/2014
Issue: 1

Drawing/Rotation:

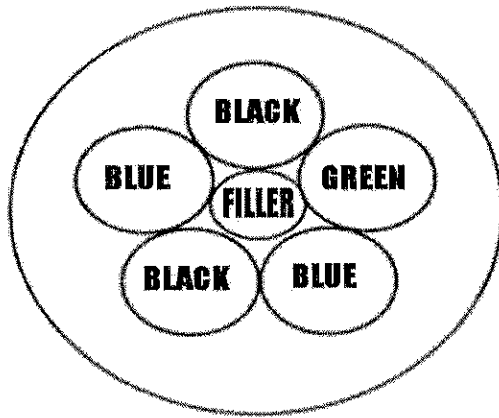

Semi-Pressure set up Tissue Tape Maybe used.