

1) CONSTRUCTION: NOM. DIA.
 CONDUCTOR: 22 AWG 7/30 STRANDED TINNED COPPER .030"
 INSULATION: POLYVINYLCHLORIDE, .010" NOM. WALL THICKNESS .050"
 CABLE: (5) INSULATED CONDUCTORS TWISTED TOGETHER TO FORM A CABLE CORE .135"
 JACKET: POLYVINYLCHLORIDE, CHROME GRAY, .032" NOM. WALL THICKNESS OVERALL CABLE DIAMETER .199"

2) PHYSICAL PROPERTIES:
 TEMPERATURE RATING, MAX. 60°C & 80°C
 TEMPERATURE RATING, MIN. -30°C
 WT./M', NOM., NET. 25.2 LBS.

3) ELECTRICAL CHARACTERISTICS:
 CAPACITANCE, MUTUAL, NOM. 28 PF/FT.
 DIELECTRIC WITHSTANDING, MIN 1500V RMS
 VOLTAGE RATING, MAX. 300V
 D.C. RESISTANCE, MAX. PER ASTM B286 16.7 Ω/M'


4) AGENCY APPROVALS:
 (UL) NEC TYPE CM
 CSA AWM FT4
 UL STYLE 2464

5) APPLICATION:
 RS232 COMPUTER INTERCONNECT, CONTROL AND SOUND CABLE. RoHS COMPLIANT.

6) PRINT:
 QUABBIN 7131R (UL) TYPE CM 22 AWG OR AWM 2464 -- CSA LL51726 AWM I/II A/B 80C 300V FT4 --
 RoHS -- **(LOT DESIGNATOR)**

7) COLOR CODE:
 1. BLACK
 2. WHITE
 3. RED
 4. GREEN
 5. BROWN

8) PACKAGING:
 TO BE PACKAGED AS PER QWC'S
 STANDARD PACKAGING

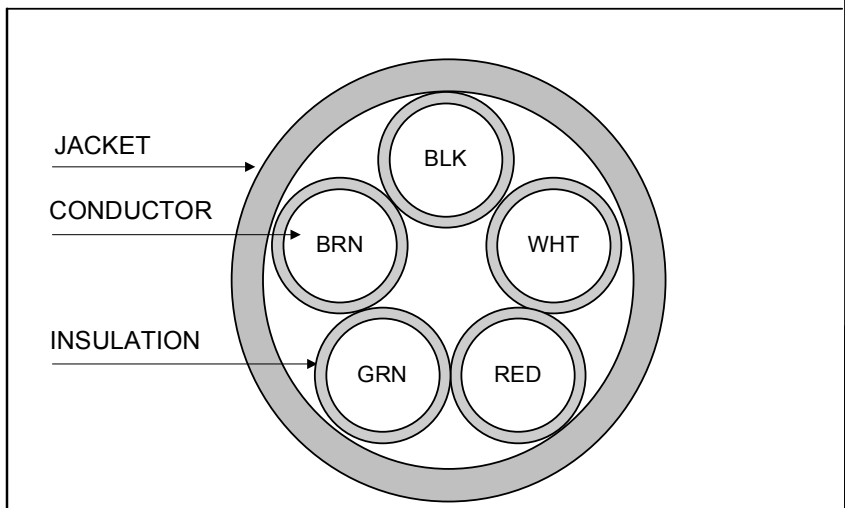

REVISION 04	DATE:	DRAWN S. ADDIE	09/22/95	
REVISED BY	<i>B. Duczynski</i> 1/2/07	CHECKED J. RIVERNIDER	09/22/95	
CHECKED	<i>J. Rivernider</i> 1/2/07	CHECKED M. FERRERO	09/22/95	
CHECKED		CUSTOMER APPROVAL: DATE:		
				TITLE 5/C 22 AWG PVC/PVC CABLE --TYPE CM, STYLE 2464, CSA AWM FT4 QUABBIN P/N 7131 1 OF 1