


# GENERAL CABLE

## FIVE CONDUCTOR #22AWG SHIELDED CABLE

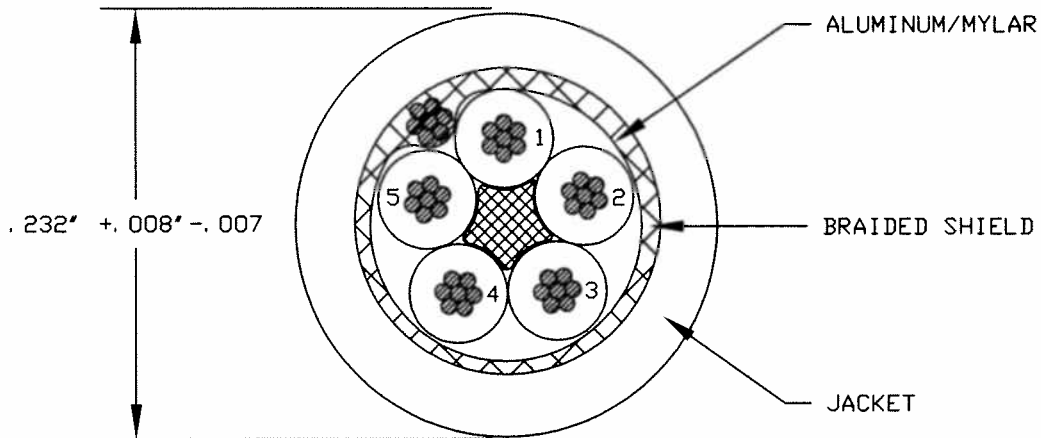

- COMPONENTS - SINGLE CONDUCTOR #22AWG (SC#22)  
 (ITEMS 1-5) CONDUCTOR: #22AWG 7/30 TINNED COPPER  
 INSULATION: CROSSLINKED POLYETHYLENE-.010" NOM. WALL.  
 DIAMETER: .051" NOMINAL
- FILLER - AS REQUIRED TO MAINTAIN A CIRCULAR CABLE CROSS-SECTION
- CABLE - CORE: (1) FILLER PULLED IN  
 LAYER I: (5) COMPONENTS (ITEMS 1-5) X 2.0" L. H. LAY
- BINDER - .0015" ALUMINUM/MYLAR TAPE-25% OVERLAP ALUMINUM SIDE OUT
- DRAIN WIRE - #22AWG 7/30 TINNED COPPER
- SHIELD - 36 AWG TINNED COPPER BRAID- 85% MINIMUM COVERAGE
- JACKET - XLPE (GRAY)-.035" NOMINAL WALL.
- DIAMETER - .232" NOMINAL
- UL - STYLE 4311 125°C 150V
- CSA - AWM IIA 125°C 150V
- NET CABLE WGT - 42 LBS/1000'
- JACKET PRINT - "GENERAL CABLE (R) BRAND-REX BRAND (WC) RJ AWM STYLE 4311 5/C 22AWG /CSA AWM IIA 125C 150V FT1/ROHS COMPLIANT DAY/MONTH/YEAR"

COLOR CODE -	ITEM NUMBER	COLOR
	1	BLACK
	2	WHITE
	3	RED
	4	GREEN
	5	BROWN

REVISIONS	0	04/16/14	FIRST ISSUE	<b>GeneralCable</b> 1600 West Main Street, Willimantic, CT 06226-1128 <u>The Power of One</u>
REFERENCES	IEWC/MILLER ELECTRIC			DRAWING NO: 12-1964
	GENERAL CABLE PT#254830 T-14447			DRAWN BY: C. MEDLING
				APPROVED BY: <i>[Signature]</i>
				THIS DRAWING IS THE PROPERTY OF GeneralCable AND SHALL NOT BE REPRODUCED, COPIED, OR USED AS BASIS FOR THE MANUFACTURE OR SALE OF THIS DESIGN WITHOUT THE PERMISSION OF GeneralCable