

1) CONSTRUCTION:

CONDUCTOR:	22 AWG 7/30 STRANDED TINNED COPPER	NOM. DIA.	.030"
INSULATION:	SEMI-RIGID POLYVINYLCHLORIDE .010" NOM. WALL THICKNESS		.050"
CABLE:	(6) CONDUCTORS TWISTED TOGETHER TO FORM A CABLE CORE		.145"
JACKET:	POLYVINYLCHLORIDE, BLACK, .032" NOM. WALL THICKNESS	OVERALL CABLE DIAMETER	.209"

2) PHYSICAL PROPERTIES:

TEMPERATURE RATING, MAX.	60°C & 80°C
WT./M', NOM., NET.	29.5 LBS.

3) ELECTRICAL CHARACTERISTICS:

CAPACITANCE, MUTUAL	35 PF/FT.
DIELECTRIC WITHSTANDING, MIN	1500V RMS
VOLTAGE RATING, MAX.	300V
D.C. RESISTANCE, MAX. PER ASTM B286	16.7 OHMS/M'

4) AGENCY APPROVALS:

UL AWM STYLE 2464

5) APPLICATION:

RoHS COMPLIANT MATERIALS

6) PRINT: (WHITE INK)


E69976 **RU** AWM STYLE 2464 – RoHS – **(LOT DESIGNATOR)**

7) COLOR CODE:

1. BLACK
2. WHITE
3. RED
4. GREEN
5. ORANGE
6. BLUE

8) PACKAGING:

TO BE PACKAGED AS PER QWC'S STANDARD PACKAGING

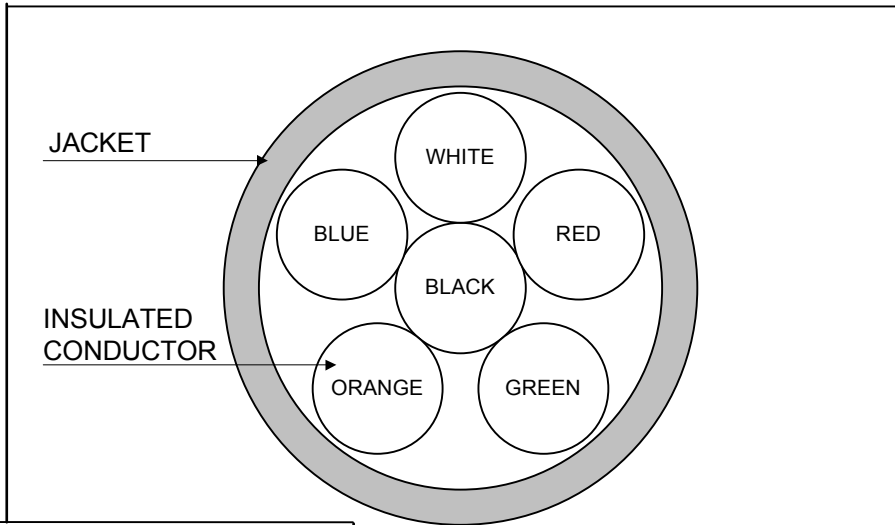

REVISION <b>03</b>	DATE:	DRAWN S. ADDIE 03/14/97	
REVISED BY	B. M. DUCZYNSKI 12/21/05	CHECKED J. RIVERNIDER 03/14/97	
CHECKED	J. RIVERNIDER 12/21/05	CHECKED	
CHECKED		CUSTOMER APPROVAL: DATE:	TITLE 6/C 22 AWG PVC/PVC CABLE -- AWM STYLE 2464
			QUABBIN P/N <b>06028</b> 1 OF 1