




**NORTHWIRE RESTRICTED**

This document contains Northwire, Inc. proprietary data, and is not to be copied, reproduced, used or divulged to unauthorized persons, in whole or in part, without proper authorization in writing from Northwire, Inc. This information is the property of Northwire, Inc. which reserves all rights to it.

DESC: 22/6 AWM 2517 105°C 300V	DWG NO: 2206A006		
SCALE: 30x	DATE: 2/25/00	DR. BY: DP LANGER	NWI NO: FAWM226-012
CUSTOMER: INDUSTRIAL ELECTRIC	CUSTOMER P/N: 2206C-4NWG		

ITEM	SPECS.
A.	22 GAUGE 26x36BC BUNCHED
B.	15 MILS PVC INSULATION 105°C 300V 13 MILS MIN. PVC INSULATION NOM. O.D. .062±.002" AWM STYLE 1569
C.	POLY FILLER
D.	TISSUE PAPER SEPARATOR
E.	30 MILS PRESSURED PVC JACKET 105°C 300V 24 MILS MIN. PVC JACKET YELLOW JACKET UL AND CSA APPROVED UV, WATER AND OIL RESISTANT

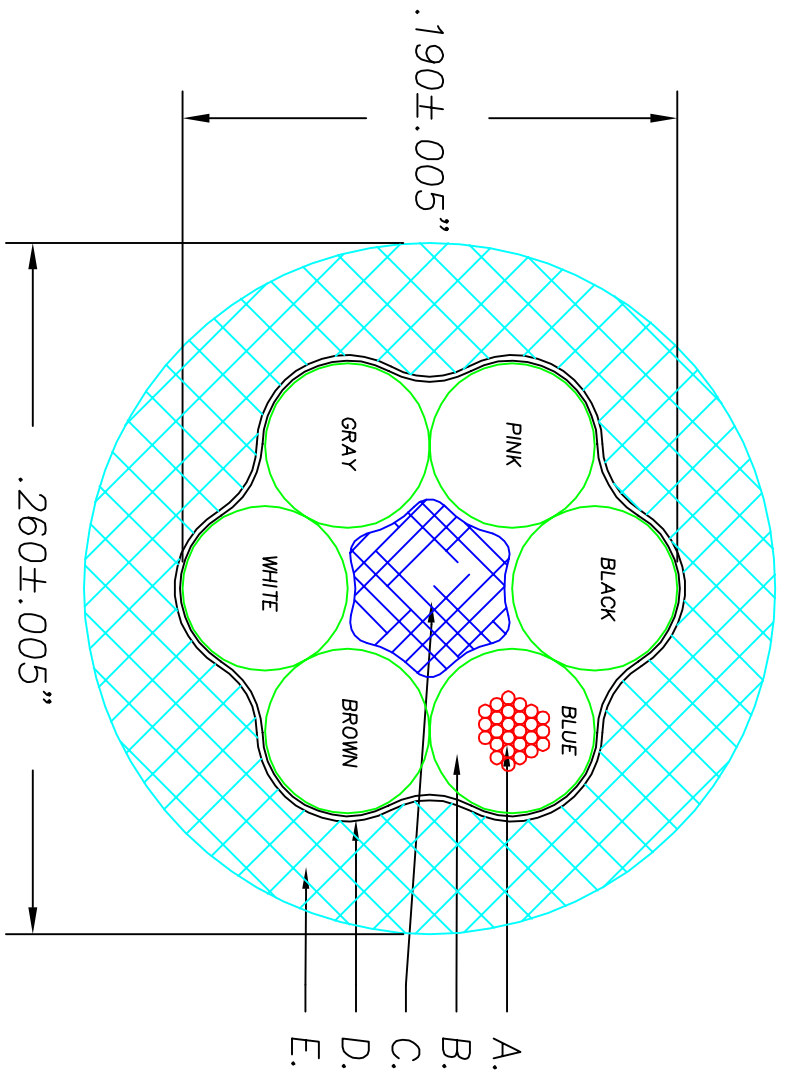

**ELECTRICAL REQUIREMENTS:**  
NONE SPECIFIED

**MECHANICAL REQUIREMENTS:**  
NONE SPECIFIED

ADDED UV, H2O AND OIL RES COMMENT	REV	REV DATE	APPROVAL
CHANGED CUSTOMER PART NUMBER	B	2/27/03	DPL
INITIAL RELEASE	A	2/25/00	DPL
REVISION RECORD			