

1) CONSTRUCTION: NOM. DIA.
 CONDUCTOR: 22 AWG 7/30 STRANDED TINNED COPPER .030"
 INSULATION: SEMI-RIGID POLYVINYLCHLORIDE, .010" NOM. WALL THICKNESS .050"
 CABLE: (7) INSULATED CONDUCTORS TWISTED TOGETHER TO FORM A .150"
 CABLE CORE .150"
 JACKET: POLYVINYLCHLORIDE, CHROME GRAY, .032" NOM. WALL THICKNESS .214"
 OVERALL CABLE DIAMETER .214"

2) PHYSICAL PROPERTIES:
 TEMPERATURE RATING, MAX. 60°C & 80°C
 WT./M', NOM., NET. 32.9LBS.

3) ELECTRICAL CHARACTERISTICS:
 CAPACITANCE, MUTUAL 28 PF/FT.
 DIELECTRIC WITHSTANDING, MIN 1500V RMS
 VOLTAGE RATING, MAX. 300V
 D.C. RESISTANCE, MAX. PER ASTM B286 16.7 OHMS/M'


4) AGENCY APPROVALS:
 (UL) NEC TYPE CM
 CSA AWM FT4
 UL AWM STYLE 2464

5) APPLICATION:
 RS232 COMPUTER INTERCONNECT, CONTROL AND SOUND CABLE. RoHS COMPLIANT MATERIALS.

6) PRINT:
 QUABBIN 7140R (UL) TYPE CM 22 AWG OR AWM 2464 -- CSA LL51726 AWM I/II A/B 80C 300V FT4 -- RoHS --
(LOT DESIGNATOR)

7) COLOR CODE:
 1. BLACK
 2. RED
 3. WHITE
 4. GREEN
 5. ORANGE
 6. BLUE
 7. BROWN

8) PACKAGING:
 TO BE PACKAGED AS PER QWC'S
 STANDARD PACKAGING

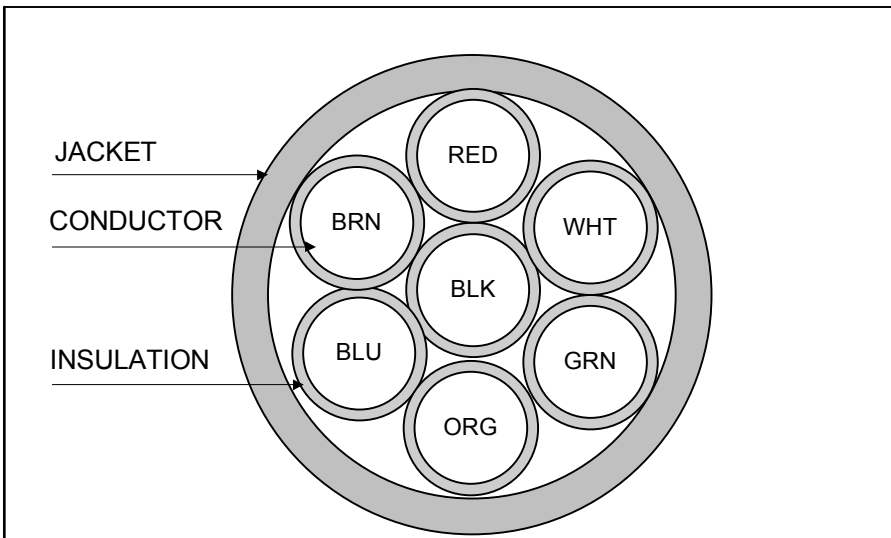

REVISION 04	DATE:	DRAWN S. ADDIE 08/08/96	
REVISED BY B. Duceyuski 3/19/07	CHECKED J. RIVERNIDER 08/08/96		
CHECKED B. Duceyuski 3/19/07	CHECKED G. MELNIK 08/08/96		
CHECKED	CUSTOMER APPROVAL: DATE:	TITLE 7/C 22 AWG PVC/PVC CABLE --TYPE CM. STYLE 2464. CSA AWM FT4	
		QUABBIN P/N 7140	1OF 1