



## Heyco® Reducer Snap Bushings


Multiple Locking Steps for Panel Thickness up to .125" (3,2 mm)

Mounting Hole Diameter Range: .375" (9,5 mm) to 2.0" (50,8 mm)

- **Reduce hole size** and convert raw-edged holes to smooth, neat, insulated holes.
- Insulate and mechanically protect electrical and telecommunications cables, tubing, hose, rope, and utility lines.
- Provide a neater look where cable O.D. to bushing I.D. clearance is minimized.
- Locking fingers snap into holes with fingertip pressure.
- Locking fingers in fractional increments up to the maximum panel thickness.
- Withstand a push back force of 35 pounds.
- Available in multiple sizes for use in .375" (9,5 mm) to 2.000" (50,8 mm) diameter holes.

MOUNTING HOLE DIAMETER		PART NO.		DESCRIPTION	PART DIMENSIONS				C Overall Height	
in.	mm.	Black	White		A Reduced Inside Diameter*		B Head Diameter		in.	mm.
.375	9,5	2020	2021	SB 375-3	.19	4,8	.47	11,9	.41	10,3
.437	11,1	2042	2037	SB 437-243	.24	6,2	.53	13,5		
		2038	2039	SB 437-4	.27	6,8				
.500	12,7	2058	2059	SB 500-4	.25	6,4	.57	14,5		
		2049	2050	SB 500-5	.31	7,9				
.562	14,3	2060	2061	SB 562-5	.31	7,9	.66	16,7		
		2063	2064	SB 562-6	.39	9,9				
.625	15,9	2075	2078	SB 625-4	.25	6,4	.72	18,2		
		2070	2071	SB 625-7	.44	11,1				
.687	17,4	2083	2084	SB 687-8	.50	12,7	.78	19,8		
.750	19,1	2090	2091	SB 750-6	.39	9,9	.85	21,6		
		2092	2099	SB 750-8	.50	12,7				
		2093	2094	SB 750-9	.56	14,3				
.812	20,6	2100	2101	SB 812-9	.56	14,3	.89	22,6		
		2110	2111	SB 875-6	.38	9,5				
		2113	2114	SB 875-7	.44	11,1				
		2116	2117	SB 875-8	.50	12,7				
		2120	2121	SB 875-9	.56	14,3				
1.093-1.125	27,8-28,6	2160	2161	SB 1093-13	.81	20,6	1.22	30,9		
		2163	2164	SB 1093-14	.88	22,2				
		2198	2199	SB 1250-15	.94	23,8				
		2207	2208	SB 1375-14	.88	22,2				
1.250	31,8	2233	2234	SB 1500-17	1.06	27,0	1.61	40,9		
		2236	2237	SB 1500-18	1.13	28,6				
1.375	34,9	2207	2208	SB 1375-14	.88	22,2	1.49	37,3		
1.500	38,1	2233	2234	SB 1500-17	1.06	27,0	1.61	40,9		
		2236	2237	SB 1500-18	1.13	28,6				
2.000	50,8	2400	2401	SB 2000-26	1.64	41,6	2.13	54,0		

Standard colors black and white. Consult Heyco for other colors.  
 \*Reduced inside diameters. For our complete line of Snap Bushings, see pages 6-3 & 6-4.

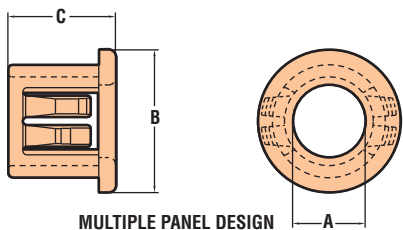

*Quick Specs*

Material	Nylon 6/6
Certifications	Recognized under the Component Program of Underwriters' Laboratories, File E15331 Certified by Canadian Standards Association, File 8919
Flammability Rating	94V-2
Temperature Range	-4°F (-18°C) to 221°F (105°C)