


# Multi-Conductor - Shielded


## Multi-Conductor - Braid Shield - 80°C CSA - FT-4 - UL

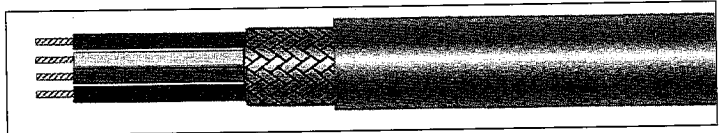

Stranded Tinned Copper Conductors  
 Conductors Twisted  
 Polyethylene Insulation  
 80% Braided Tinned Copper Shield  
 Mylar Wrap  
 PVC Jacket - Grey  
 -20° C + 80° C  
 Colour Code: 1) Blk, 2) White, 3) Red  
 4) Green, 5) Yellow, 6) Blue, 7) Brown  
 8) Orange, 9) Grey, 10) Purple

Cat. No.	No. Cond.	Cond. Size	Cond. Strand	Insul. Thick	Jkt. Thick	Nom. O.D.	Nom. Cap. PF/FT	A	B	Voltage	Put-Up meters	Weight lbs.
7202	2	20	26x34	.015	.030	.224	26	47	26	600	300/150	36/18
7203	3	20	26x34	.015	.030	.235	25	45	25	600	300/150	42/21
7204	4	20	26x34	.015	.030	.253	24	43	24	600	300/150	48/24
7205	5	20	26x34	.015	.030	.263	21	38	21	600	300/150	54/27
7206	6	20	26x34	.015	.030	.281	16	28	16	600	300/150	58/29
7208	8	20	26x34	.015	.030	.310	16	28	16	600	300/150	74/37
7210	10	20	26x34	.015	.030	.337	16	28	16	600	300/150	92/46

## Multi-Conductor - Foil/Braid Shield CSA - FT-4 - UL

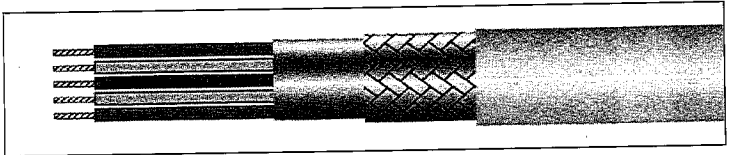

Stranded Tinned Copper Conductors  
 Conductors Twisted  
 SR PVC Insulation  
 100% Aluminum Foil Shield  
 24 AWG Stranded Tinned Copper Drain Wire  
 85% Braided Tinned Copper Shield  
 PVC Jacket - Grey  
 -20° C + 105° C  
 Colour Code: Chart 2

Cat. No.	No. Cond.	Cond. Size	Cond. Strand	Insul. Thick	Jkt. Thick	Nom. O.D.	Voltage	Put-Up meters	Weight lbs.
5803	3	24	7x32	.010	.020	.157	600	300/150	28/14
5804	4	24	7x32	.010	.020	.168	600	300/150	32/16
5806	6	24	7x32	.010	.023	.192	600	300/150	38/19
5809	9	24	7x32	.010	.023	.220	600	300/150	48/24
5812	12	24	7x32	.010	.023	.243	600	300/150	58/29
5815	15	24	7x32	.010	.023	.264	600	300/150	62/31
5820	20	24	7x32	.010	.030	.294	600	300/150	86/43
5825	25	24	7x32	.010	.030	.341	600	300/150	98/49
5703	3	22	7x30	.010	.020	.170	600	300/150	32/16
5704	4	22	7x30	.010	.023	.189	600	300/150	38/19
5706	6	22	7x30	.010	.023	.209	600	300/150	46/23
5709	9	22	7x30	.010	.023	.251	600	300/150	62/31
5712	12	22	7x30	.010	.023	.277	600	300/150	74/37
5715	15	22	7x30	.010	.023	.301	600	300/150	86/43
5720	20	22	7x30	.010	.030	.345	600	300/150	108/54
5725	25	22	7x30	.010	.030	.376	600	300/150	128/64