


10 CONDUCTOR 22 AWG CABLE

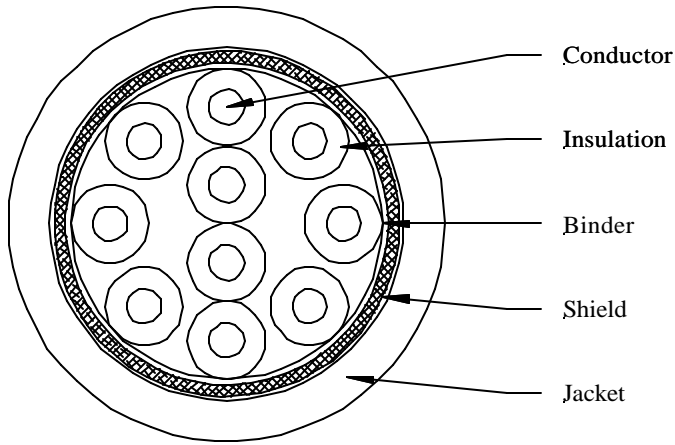

ELECTRICAL CHARACTERISTICS

Conductor DC Resistance: 0.016 Ohms/ft Nominal @ 20°C

SAFETY CERTIFICATION

UL Listing: Type CL2 as specified in Article 725 of the National Electrical Code

UL Recognized: AWM Style 2464 80°C 300 Volts VW -1

CSA Certification: AWM II A/B 80°C 300 Volts FT1

CONSTRUCTION

Single Component

Conductor: 22 AWG 7/30 Tin Plated Copper, 0.030 Inch Diameter

Insulation: 0.010 Inches of Semi-Rigid PVC, 0.050 Inch Diameter

Final Assembly

Core: 2 Singles (#1-2) Cabled Together

Layer 1: 8 Singles (#3-10) Cabled Around Core

Binder: Polyester Tape, 25% Overlap

Shield: 36 AWG Tin Plated Copper Braid, 85% Coverage

Jacket: 0.036 Inches of PVC, Color – Medical White

Diameter: 0.280 Inches Nominal

Print Legend (Black Ink): "TYPE CL2 75° 22 AWG(UL) OR AWMSTYLE 2464
MADISON CABLE CORP. CSA AWM II A/B 80°C 300V FT1"

COLOR CODE

Conductor #	Insulation Color
1	Black
2	White
3	Red
4	Green
5	Brown
6	Blue
7	Orange
8	Yellow
9	Violet
10	Gray

MADISON Cable Corporation

125 Goddard Memorial Drive • Worcester, MA 01603 USA
Tel: (508) 752-2884 Fax: (508) 752-4230

Spec Number:	100-8863
Part Number:	10RGD00002
Customer:	
Customer #:	

REVISION HISTORY

Rev #	Date	By	Description
1	09/09/03	HA	Initial Release

Prepared By:	H. Abusamra	<i>HA</i>	9/9/03	
Reviewed By:	B. Harvie	<i>BH</i>	9/9/03	Page 1 of 1