

10 Conductor 22 AWG PVC Shielded Cable

Conductors: 22 AWG 7/30" Tinned Copper

Insulation: Semi-Rigid PVC
Thickness: .010" Nominal
Diameter: .050" Nominal

Color Code: Black, Brown, Red, Orange, Yellow,
Green, Blue, Violet, Gray, White

Core: 2 Conds surrounded by Superbulk Foamed Polypropylene Filler
Outer Layer: 8 Conductors

→ Drain: 24 (7/32) Tinned Copper

Shield: Overall Aluminum Mylar Foil Shield 25% overlap


Jacket: Thickness: .032" Nominal Flexible PVC
Jacket Color: Gray

Cable Diameter: .270" Nominal

Print: "E194074 10/C 22 AWG 80C (UL) TYPE CM 75C CL3
OR AWM 2464 LL163715 CSA TYPE CMG FT4"

REVISION			
REV.	DR BY	DESCRIPTION	DATE

DRAFT

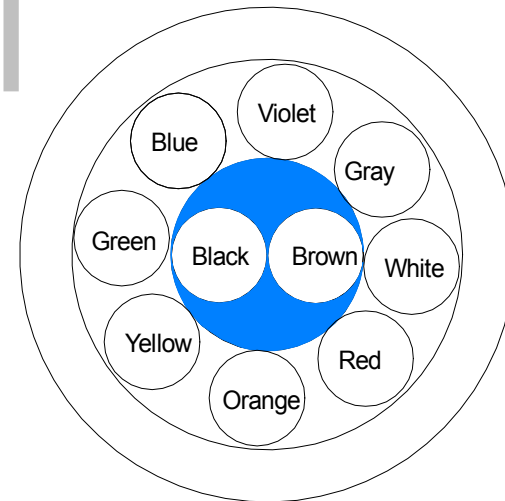

<i>Hueson Corporation</i>		
<i>Product Specification</i>		
Drawn By: B. Hanlon	Product Description 10 Cond. 22 AWG SR-PVC/PVC	REV 0
Date Oct 28, 2008	Drawing No.	