


# DGC DATA GUIDE CABLE

## SPECIALTY & CUSTOM CABLES

232 Sherman Street Gardner, MA 01440

Phone: 978-632-0900 Fax: 978-630-1872

Visit us on our website; [www.dataguidecable.com](http://www.dataguidecable.com)

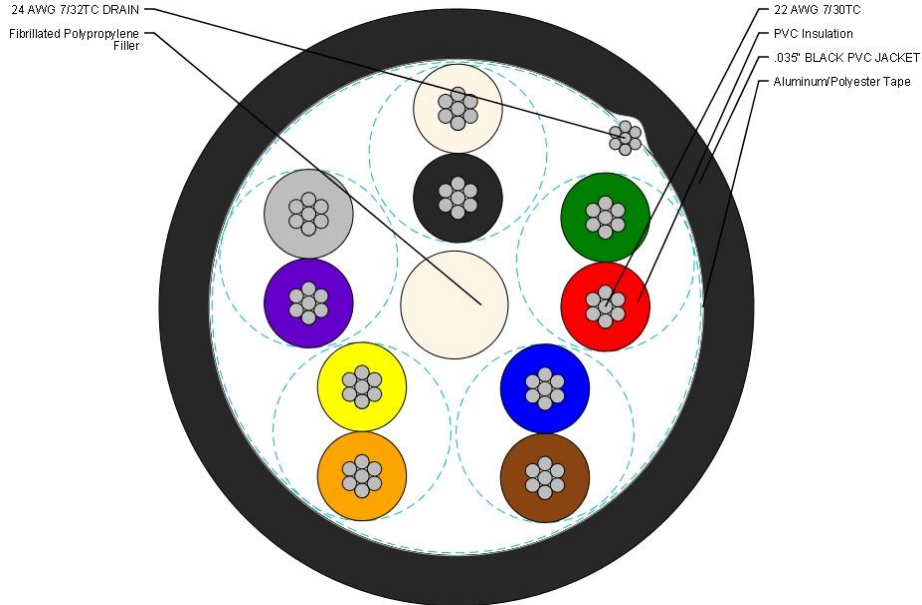

### 5PR O/A SHLD AWM LOW TEMP. CABLE


### LISTING / AGENCY APPROVAL

**COMPONENT A**  
**CONDUCTORS (5 Pair total):**  
 22 AWG 7/30 TC Insulated with .016" Nominal Wall of PVC to a Nominal O.D. of 0.062"  
 2" Nominal Left Hand Direction Lay

**PAIR COLOR CODE:**  
 BLACK & WHITE, RED & GREEN, BROWN & BLUE, ORANGE & YELLOW, PURPLE & GRAY

**FINAL CABLING:**  
 4-1/4" Nominal Left Hand Direction Lay  
 Tape Shield: Aluminum/Polyester Foil Facing Out, 25% Overlap  
 Drain: 24 AWG, 7/32 TC Over Tape Shield  
 Filler: Fibrillated Polypropylene in Core Area

**FINAL JACKET:**  
 Material: PVC  
 Color: BLACK  
 Wall Thickness: 0.035"  
 Finished Cable Diameter: 0.348"

Surface Printed in White Ink: "E90298  AWM STYLE 2464 80C 300V VW-1 -- LL91737 CSA AWM I/II A/B FT1 300 VOLT 80C -- SUITABLE AT -40C"

RoHS  
 CSA AWM I/II A/B FT1  
 UL AWM 2464 80C 300V  
 SUITABLE TO -40C(STATIC BEND)

### REVISION HISTORY

0	10-28-1997	WJD	FIRST ISSUE
1	5-28-1999	WJD	ADD "FT1" TO PRINT LEGEND
2	2-24-2020	WJD	REFORMAT-REDESIGN

Customer Number	2210POFS-0DGA
D.G. Part Number	97K27-9
Prepared By: MKL	
Reviewed By: WJD	

**CUSTOMER APPROVAL (AS APPLICABLE)**

Title: \_\_\_\_\_

Date: \_\_\_\_\_