

15 Conductor Cable

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

Conductors: 22 AWG 7/30 Tinned Copper per ASTM B-33

Insulation: Premium grade PVC .010"

Diameter: .050" ± .003"

Cable Core: 15 conductors are cabled together

Tapes: Overall Clear Mylar Tape

Fillers: May be required for roundness

Core Diameter: .230" Nominal

Color Code: Black, Red, White, Green, Orange, Blue, Brown, Yellow, Violet, Gray, Pink, Tan, Red/Green, Red/Yellow, Red/Black


Jacket: .032" Gray PVC Jacket

Finished Cable: .294" Nominal O.D. (.310" max)

Print: E174416 15/C 22 AWG 75C (UL) Type CM or AWM 2576---LL-167315
CSA TYPE CMG FT4

Packaged: 1,000' Wood Spools

RoHS, Reach Compliant

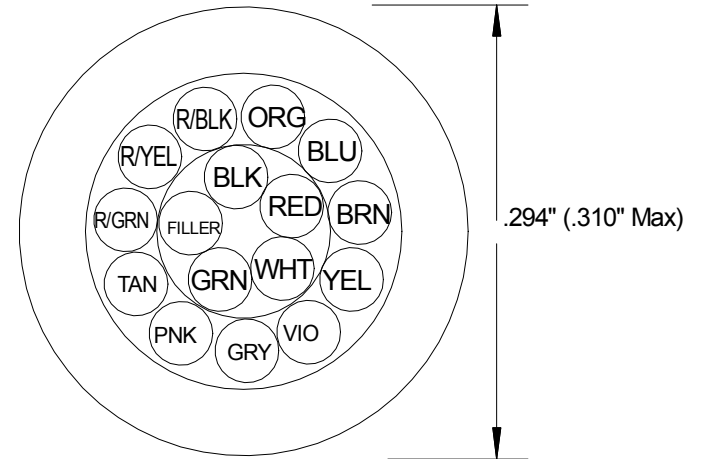

Industrial Electric Wire & Cable

Product Specification

<small>Drawn By:</small>	<small>Product Description</small> 22 AWG 15 Conductor	<small>REV</small> 0
<small>Date</small> May 3, 2010	<small>Drawing No.:</small> # 5168	