

1) CONSTRUCTION: NOM. DIA.  
 CONDUCTOR: 22 AWG 7/30 STRANDED TINNED COPPER .030"  
 INSULATION: LEAD FREE POLYVINYLCHLORIDE, .010" NOM. WALL THICKNESS .050"  
 CABLE: (12) INSULATED CONDUCTORS TWISTED TOGETHER TO FORM A CABLE CORE .202"  
 JACKET: LEAD FREE POLYVINYLCHLORIDE, CHROME GRAY, .032" NOM. WALL THICKNESS OVERALL CABLE DIAMETER .266"

2) PHYSICAL PROPERTIES:  
 TEMPERATURE RATING, MAX. 60°C & 80°C  
 TEMPERATURE RATING, MIN. -30°C  
 WT./M', NOM., NET. 51.5 LBS.

3) ELECTRICAL CHARACTERISTICS:  
 CAPACITANCE, MUTUAL 30 PF/FT.  
 DIELECTRIC WITHSTANDING, MIN 1500V RMS  
 VOLTAGE RATING, MAX. 300V  
 D.C. RESISTANCE, MAX. 16.7 OHMS/M'


4) AGENCY APPROVALS:  
 (UL) NEC TYPE CM  
 CSA AWM FT4  
 UL STYLE 2464 80C 300V

5) APPLICATION:  
 RS232 COMPUTER INTERCONNECT, CONTROL AND SOUND CABLE. RoHS COMPLIANT

6) PRINT:  
 QUABBIN 7160R (UL) TYPE CM 22 AWG OR AWM 2464 -- CSA LL51726 AWM I/II A/B 80C 300V FT4 -- RoHS --  
**(LOT DESIGNATOR)**

- 7) COLOR CODE:
1. BLACK
  2. RED
  3. WHITE
  4. GREEN
  5. ORANGE
  6. BLUE
  7. BROWN
  8. YELLOW
  9. VIOLET
  10. GRAY
  11. PINK
  12. TAN

8) PACKAGING:  
 TO BE PACKAGED AS PER QWC'S  
 STANDARD PACKAGING

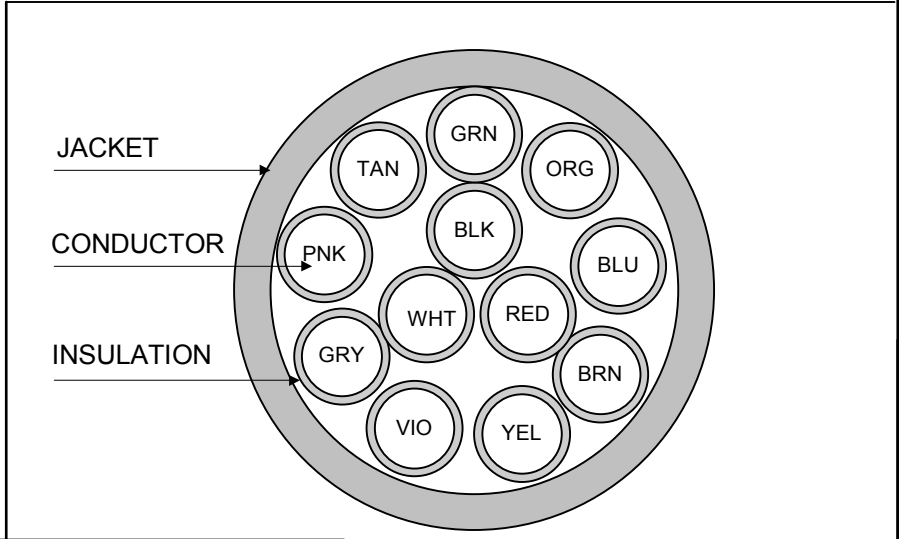

|             |                         |                       |          |  |
|-------------|-------------------------|-----------------------|----------|--|
| REVISION 03 | DATE:                   | DRAWN S. ADDIE        | 12/04/95 |  |
| REVISED BY  | B. M. DUCZYNSKI 2/23/05 | CHECKED J. RIVERNIDER | 12/04/95 |  |
| CHECKED     | G. MELNIK 2/23/05       | CHECKED M. FERRERO    | 12/04/95 |  |
| CHECKED     |                         | CUSTOMER APPROVAL:    | DATE:    | TITLE  |
|             |                         |                       |          | 12/C 22 AWG PVC/PVC CABLE --TYPE CM, STYLE 2464, CSA AWM FT4 |
|             |                         |                       |          | QUABBIN P/N 7160 1 OF 1                                      |