

1) CONSTRUCTION:		NOM. DIA.
CONDUCTOR:	22 AWG 7/30 STRANDED TINNED COPPER	.030"
INSULATION:	SEMI-RIGID POLYVINYLCHLORIDE, .010" NOM. WALL THICKNESS	.050"
CABLE:	(15) INSULATED CONDUCTORS TWISTED TOGETHER TO FORM A CABLE CORE	.228"
SHIELD:	AN OVERALL ALUMINUM POLYESTER SHIELD (FOIL OUT, 100% COVERAGE) SHALL BE APPLIED OVER THE CABLE CORE AND SHALL INCLUDE A 22 AWG 7/30 STRANDED TINNED COPPER DRAIN WIRE IN CONTACT WITH THE METALIZED SURFACE	.231"
JACKET:	POLYVINYLCHLORIDE, CHROME GRAY, .032" NOM. WALL THICKNESS	.295"
	OVERALL CABLE DIAMETER	

2) PHYSICAL PROPERTIES:	
TEMPERATURE RATING, MAX.	60°C & 80°C
TEMPERATURE RATING, MIN.	-20°C
WT./M', NOM., NET.	67.9 LBS.

3) ELECTRICAL CHARACTERISTICS:	
CAPACITANCE, MUTUAL NOM.	36 PF/FT.
CAPACITANCE, GROUNDED NOM.	67 PF/FT.
DIELECTRIC WITHSTANDING, MIN.	2000V RMS
VOLTAGE RATING, MAX.	300V
D.C. RESISTANCE, MAX.	16.7 Ω/1000'


- 4) AGENCY APPROVALS:
 (UL) NEC TYPE CM
 CSA AWM FT4
 (UL) AWM STYLE 2464

5) APPLICATION:
 COMMUNICATIONS, DATA, AND CONTROL CABLE. RoHS COMPLIANT MATERIALS.

6) PRINT:
 QUABBIN 7565 (UL) TYPE CM 22 AWG SHIELDED OR AWM 2464 -- CSA LL51726 AWM I/II A/B 80C 300V FT4 -- RoHS --
(LOT DESIGNATOR)

- 7) COLOR CODE:
1. BLACK
 2. RED
 3. WHITE
 4. GREEN
 5. ORANGE
 6. BLUE
 7. BROWN
 8. YELLOW
 9. VIOLET
 10. GRAY
 11. PINK
 12. TAN
 13. RED/GREEN
 14. RED/YELLOW
 15. RED/BLACK

8) PACKAGING:
 TO BE PACKAGED AS PER QWC'S
 STANDARD PACKAGING

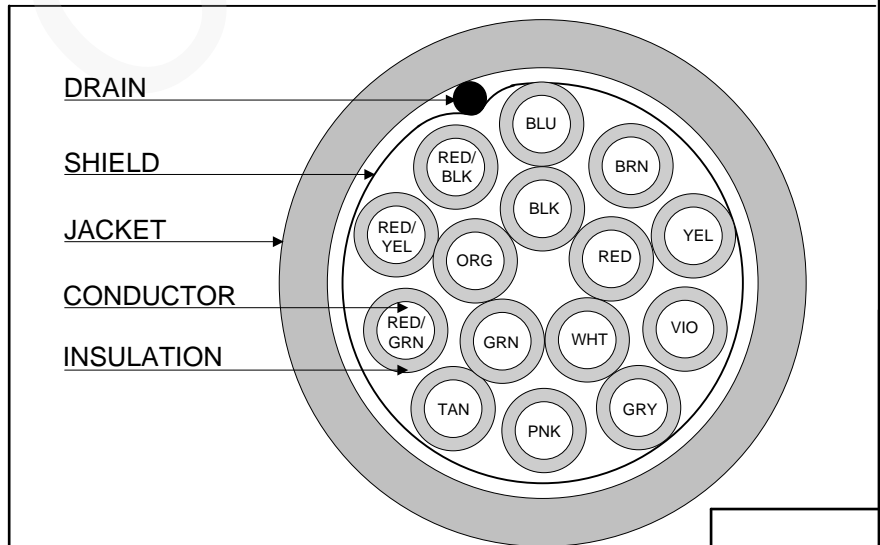

CUSTOMER APPROVAL:

DATE:

Created 09/08/95	DRAWN: BMD 04/09/18	
REV. 04	CHECKED: ZRS 04/09/18	
TITLE 15/C 22 AWG PVC/PVC CABLE --TYPE CM, STYLE 2464, CSA AWM FT4		
QUABBIN P/N	7565	1 of 1