



- 1) CONSTRUCTION: NOM. DIA.
 CONDUCTOR: 22 AWG 7/30 STRANDED TINNED COPPER .030"
 INSULATION: LEAD FREE POLYVINYLCHLORIDE, .010" NOM. WALL THICKNESS .050"
 CABLE: (20) INSULATED CONDUCTORS TWISTED TOGETHER WRAPPED WITH A CLEAR POLYESTER BINDER TO FORM A CABLE CORE (FILLER CENTER MEMBER) .276"
 JACKET: LEAD FREE POLYVINYLCHLORIDE, CHROME GRAY, .032" NOM. WALL THICKNESS OVERALL CABLE DIAMETER .340"
- 2) PHYSICAL PROPERTIES:
 TEMPERATURE RATING, MAX. 60°C & 80°C
 WT./M', NOM., NET. 83.5 LBS.
- 3) ELECTRICAL CHARACTERISTICS:
 CAPACITANCE, MUTUAL 28PF/FT.
 DIELECTRIC WITHSTANDING, MIN 1500V RMS
 VOLTAGE RATING, MAX. 300V
 D.C. RESISTANCE, MAX. 16.7 OHMS/M'
- 4) AGENCY APPROVALS:
 (UL) NEC TYPE CM
 CSA AWM FT4
 UL STYLE 2464 80C 300V
- 5) APPLICATION:
 RS232 COMPUTER INTERCONNECT, CONTROL AND SOUND CABLE. RoHS COMPLIANT MATERIALS.
- 6) PRINT:
 QUABBIN 7170R (UL) TYPE CM 22 AWG OR AWM 2464 -- CSA LL51726 AWM I/II A/B 80C 300V FT4 -- RoHS --
(LOT DESIGNATOR)

- 7) COLOR CODE:
1. BLACK
 2. RED
 3. WHITE
 4. GREEN
 5. ORANGE
 6. BLUE
 7. BROWN
 8. YELLOW
 9. VIOLET
 10. GRAY
 11. PINK
 12. TAN
 13. RED/GREEN
 14. RED/YELLOW
 15. RED/BLACK
 16. WHITE/BLACK
 17. WHITE/RED
 18. WHITE/GREEN
 19. WHITE/YELLOW
 20. WHITE/BLUE

- 8) PACKAGING:
 TO BE PACKAGED AS PER QWC'S STANDARD PACKAGING

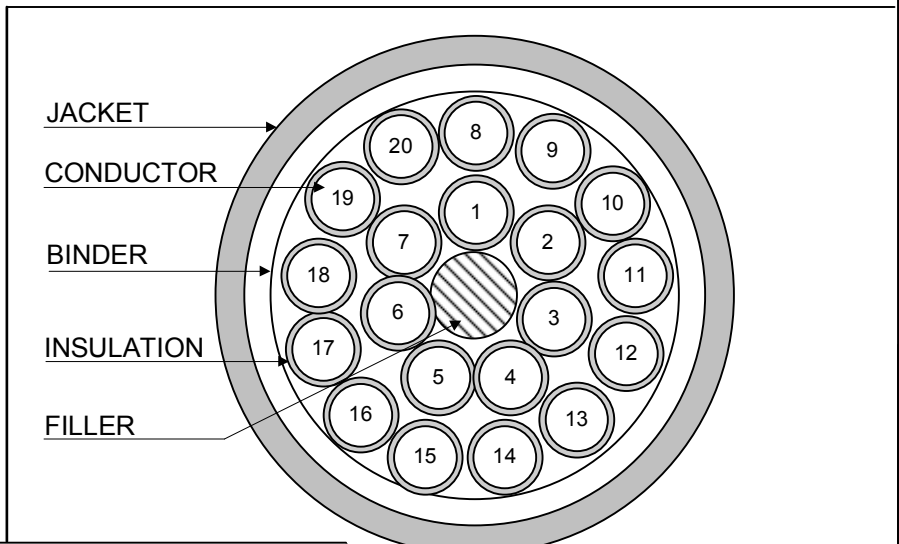

REVISION 03	DATE:	DRAWN S. ADDIE 01/19/98	
REVISED BY	B. M. DUCZYNSKI 5/6/05	CHECKED J. RIVERNIDER 01/19/98	
CHECKED	J. RIVERNIDER 5/6/05	CHECKED	
CHECKED		CUSTOMER APPROVAL: DATE:	TITLE
			20/C 22 AWG PVC/PVC CABLE --TYPE CM, STYLE 2464, CSA AWM FT4
			QUABBIN P/N 7170 1 OF 1