


DGC DATA GUIDE CABLE

Electronic and Electrical Wire & Cable Products

232 Sherman Street Gardner, MA 01440
 Phone: 978-632-0900 Fax: 978-630-1872
 Visit us on our website; www.dataquidecable.com

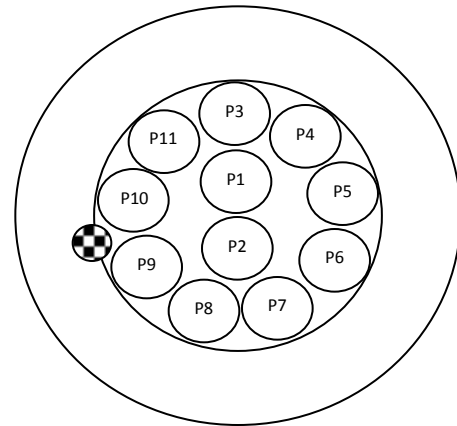

11 PAIR 22 AWG PVC INSULATED GENERAL PURPOSE SHIELDED CABLE UL TYPE INSTRUMENTATION TRAY CABLE, AWM LISTED STYLE 2464 AND CSA TYPE CMG

CONDUCTOR:

- 22 AWG 7 Strands 30 AWG Tinned *Overcoat Copper in Accordance with ASTM B 470-68 Type III

DIELECTRIC:

- .010" Nominal Wall Thickness S-R PVC to Diameter of .051" +/- .002"

COLOR CODED:

- As Indicated

PAIR ASSEMBLY:

- Lay Length: 1- 1/2" Nominal Left Hand

CABLE ASSEMBLY:

- Lay Length: 5 - 1/4" Nominal Left Hand
- Filler: None Required
- Shield: .0015" Nominal Thickness Aluminum/Polyester Tape Applied Helically with Foil Facing Inward
- Drain: 22 AWG 7/30 Tinned Copper under Foil Shield

JACKET:

- Material: Polyvinyl Chloride
- Color: Allen Bradley Gray
- Wall Thickness: .053"
- Finished Cable Diameter: .440" Nominal

CABLE MARKINGS:

- Type: Ink Surface Printing of Jacket
- Legend: "E123820 22AWG (UL) TYPE CMG 105C OR ITC OR AWM 2464 80C 300V -- LL91737 CSA TYPE CMG 105C"

COLOR CODE

PAIR	COLOR
1	BLACK & RED
2	BLACK & WHITE
3	BLACK & GREEN
4	BLACK & BLUE
5	BLACK & YELLOW
6	BLACK & BROWN
7	BLACK & ORANGE
8	RED & WHITE
9	RED & GREEN
10	RED & BLUE
11	RED & YELLOW

AGENCY APPROVAL

- UL TYPE CMG PER SUBJECT 444
- UL TYPE ITC PER SUBJECT 2250
- UL AWM STYLE 2464
- CSA TYPE CMG
- RoHS

REVISION HISTORY

-	8/01/14	WD	INITIAL RELEASE

Customer Number	
D.G. Part Number	04L15-4
Prepared By:	KAM
Reviewed By:	WJD