




## Heyco® Armor Bushings

- Use with Flexible Armored Cable (BX) and Flexible Metallic Conduit (FMC), to insulate rough cut conduit ends.
- Chamfered lead-in allows for fast installation.
- Suitable for installation at temperatures up to 194°F (90°C) and as low as -40°F (-40°C).
- Size-marked for easy identification.

WILL FIT THESE ARMORED CABLES (AWG/CONDUCTORS)	PART NO.	DESCRIPTION	PART DIMENSIONS					
			A Inside Diameter		B Head Diameter		C Overall Height	
			in.	mm.	in.	mm.	in.	mm.
14/2, 14/3, 12/2, 12/3	2264	AB 0	.37	9,4	.68	17,3	.58	14,7
14/4, 6/1, 4/1	2265	AB 1	.44	11,2	.70	17,8	.63	16,0
12/4, 10/2, 10/3, 2/1	2266	AB 2	.57	14,5	.85	21,6	.61	15,5
	2281	AB Orange*	.58	14,7	.90	22,9	.68	17,3
10/4, 8/2, 8/3, 1/1	2267	AB 3	.73	18,5	1.02	25,9	.70	17,8

Standard color red except as noted.  
\*This part is not UL or CSA certified.

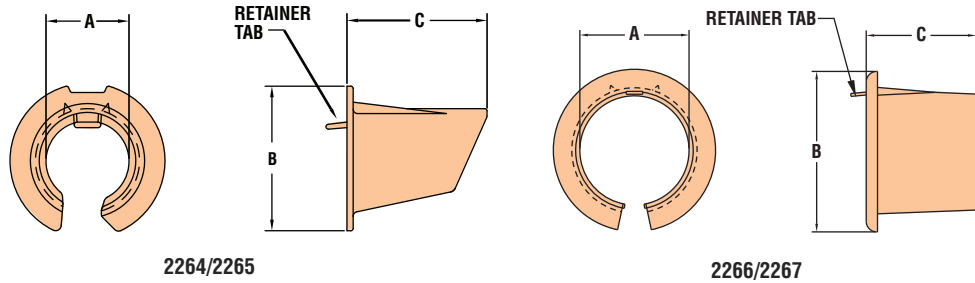


## Heyco® Threaded Insulating Bushing

- Converts raw-edged pipe ends with NPT threads to smooth insulated ends.
- Insulates and mechanically protects lamp cords, other electrical and communications cables, tubing, hose, rope, and utility lines.
- Molded of type Nylon 6/6.
- Quick Specs below do not apply.

TRADE SIZE NPT	PART NO.	DESCRIPTION	PART DIMENSIONS					
			A Inside Diameter		B Head Diameter		C Overall Height	
			in.	mm.	in.	mm.	in.	mm.
1/8	2282	IB 1/8	.27	6,8	.53	13,4	.30	7,6

Available in black color only.

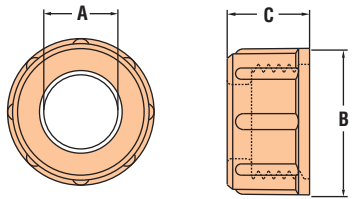

*Quick Specs*

Material	High Dielectric Polyethylene
Certifications	<ul style="list-style-type: none"> <li>UL Listed under Underwriters' Laboratories File E51579</li> <li>CSA Certified by the Canadian Standards Association File 213253</li> </ul>
Temperature Range	-40°F (-40°C) to 194°F (90°C)