

Nickel Plated Brass Liquid Tight Strain Relief Fitting

Multi-Hole - Metric Threads




Nickel Plated Brass

| Part Numbers | | Thread Type & Size | Dimensions in Inches (mm) | | | | |
|---------------------------------|-----------|----------------------|---------------------------|-------------------|---------------|------------------------------|---------------|
| -40°F to 212°F (-40°C to 100°C) | | | No. of Holes | Diameter of Holes | | Part Numbers of Inserts Only | |
| Dome | Flex** | mm | | Inches | | | |
| CD12MP-BR | CF12MP-BR | M12 X 1.5 | Solid Insert | | 1.089.0799.19 | | |
| CD16M1-BR | CF16M1-BR | M16 X 1.5 | 4 | 1.4 | .06 | 1.089.0900.19 | |
| CD16M2-BR | CF16M2-BR | | 2 | 3.0 | .12 | 1.089.0901.19 | |
| CD16M3-BR | CF16M3-BR | | 5 | 1.6 | .06 | 1.089.0902.19 | |
| CD16M4-BR | CF16M4-BR | | 2 | 1.7 | .07 | 1.089.0903.19 | |
| CD16M5-BR | CF16M5-BR | | 10 | 1.4 | .06 | 1.089.0904.19 | |
| CD16M6-BR | CF16M6-BR | | 6 | 1.4 | .06 | 1.089.0905.19 | |
| CD16M7-BR | CF16M7-BR | | 3 | 1.7 | .07 | 1.089.0906.19 | |
| CD16M8-BR | CF16M8-BR | | 4 | 1.7 | .07 | 1.089.0907.19 | |
| CD16M9-BR | CF16M9-BR | | 4 | 2.3 | .09 | 1.089.0908.19 | |
| CD16MP-BR | CF16MP-BR | | Solid Insert | | 1.089.0999.19 | | |
| CD17M1-BR | CF17M1-BR | | M16 X 1.5 (Enlarged) | 2 | 3.0 | .12 | 1.089.1100.19 |
| CD17M2-BR | CF17M2-BR | | | 3 | 3.0 | .12 | 1.089.1101.19 |
| CD17M3-BR | CF17M3-BR | | | 2 | 4.0 | .16 | 1.089.1102.19 |
| CD17M4-BR | CF17M4-BR | 3 | | 1.5 | .06 | 1.089.1103.19 | |
| CD17M5-BR | CF17M5-BR | 4 | | 2.8 | .11 | 1.089.1104.19 | |
| CD17MP-BR | CF17MP-BR | Solid Insert | | 1.089.1199.19 | | | |
| CD20M1-BR | CF20M1-BR | M20 X 1.5 | 3 | 2.0 | .08 | 1.089.1300.19 | |
| CD20M2-BR | CF20M2-BR | | 6 | 3.0 | .12 | 1.089.1301.19 | |
| CD20M3-BR | CF20M3-BR | | 3 | 4.0 | .16 | 1.089.1302.19 | |
| CD20M4-BR | CF20M4-BR | | 2 | 5.0 | .20 | 1.089.1303.19 | |
| CD20M5-BR | CF20M5-BR | | 3 | 3.0 | .12 | 1.089.1304.19 | |
| CD20M6-BR | CF20M6-BR | | 2 | 5.2 | .20 | 1.089.1305.19 | |
| CD20M7-BR | CF20M7-BR | | 2 | 3.8 | .15 | 1.089.1306.19 | |
| CD20M8-BR | CF20M8-BR | | 2 | 4.2 | .17 | 1.089.1307.19 | |
| CD20M9-BR | CF20M9-BR | | 2 | 2.5 | .10 | 1.089.1308.19 | |
| CD20MP-BR | CF20MP-BR | | Solid Insert | | 1.089.1399.19 | | |
| CD22M1-BR | CF22M1-BR | M20 X 1.5 (Enlarged) | 3 | 3.0 | .12 | 1.089.1600.19 | |
| CD22M2-BR | CF22M2-BR | | 3 | 4.0 | .16 | 1.089.1601.19 | |
| CD22M3-BR | CF22M3-BR | | 4 | 4.0 | .16 | 1.089.1602.19 | |
| CD22M4-BR | CF22M4-BR | | 5 | 4.0 | .16 | 1.089.1603.19 | |
| CD22M5-BR | CF22M5-BR | | 6 | 4.0 | .16 | 1.089.1604.19 | |
| CD22M6-BR | CF22M6-BR | | 2 | 6.0 | .24 | 1.089.1605.19 | |
| CD22M7-BR | CF22M7-BR | | 3 | 5.6 | .22 | 1.089.1606.19 | |
| CD22M8-BR | CF22M8-BR | | 6 | 3.0 | .12 | 1.089.1607.19 | |
| CD22M9-BR | CF22M9-BR | | *4 | 3.0 | .12 | *1.089.1610.19 | |
| CD22M0-BR | CF22M0-BR | | 6 | 3.8 | .15 | 1.089.1909.19 | |
| CD22MP-BR | CF22MP-BR | | Solid Insert | | 1.089.1699.19 | | |

| Part Numbers | | Thread Type & Size | Dimensions in Inches (mm) | | | |
|---------------------------------|-----------|--------------------|---------------------------|-------------------|---------------|------------------------------|
| -40°F to 212°F (-40°C to 100°C) | | | No. of Holes | Diameter of Holes | | Part Numbers of Inserts Only |
| Dome | Flex** | mm | | Inches | | |
| CD25M1-BR | CF25M1-BR | M25 X 1.5 | 4 | 6.0 | .24 | 1.089.2100.19 |
| CD25M2-BR | CF25M2-BR | | 3 | 7.0 | .28 | 1.089.2101.19 |
| CD25M3-BR | CF25M3-BR | | 2 | 8.0 | .31 | 1.089.2102.19 |
| CD25M4-BR | CF25M4-BR | | 4 | 5.0 | .20 | 1.089.2103.19 |
| CD25M5-BR | CF25M5-BR | | 1 | 8.0 | .31 | 1.089.2104.19 |
| CD25M6-BR | CF25M6-BR | | 4 | 5.2 | .20 | 1.089.2105.19 |
| CD25M7-BR | CF25M7-BR | | 3 | 5.2 | .20 | 1.089.2106.19 |
| CD25M8-BR | CF25M8-BR | | 4/1 | 5.2/3.7 | .20/.15 | 1.089.2107.19 |
| CD25M9-BR | CF25M9-BR | | 2 | 7.4 | .29 | 1.089.2108.19 |
| CD25MP-BR | CF25MP-BR | | Solid Insert | | 1.089.2199.19 | |
| CD32M1-BR | - | M32 X 1.5 | 6 | 6.5 | .26 | 1.089.2900.19 |
| CD32M2-BR | - | | 4 | 9.0 | .35 | 1.089.2901.19 |
| CD32M3-BR | - | | 4 | 9.5 | .37 | 1.089.2902.19 |
| CD32MP-BR | - | | Solid Insert | | 1.089.2908.19 | |
| CD40M1-BR | - | M40 X 1.5 | 5 | 9.0 | .35 | 1.089.3600.19 |
| CD40M2-BR | - | | 7 | 9.0 | .35 | 1.089.3601.19 |
| CD40M3-BR | - | | 6 | 8.0 | .31 | 1.089.3602.19 |
| CD40M4-BR | - | | 2 | 15.0 | .59 | 1.089.3603.19 |
| CD40MP-BR | - | Solid Insert | | 1.089.3699.19 | | |
| CD50M1-BR | - | M50 X 1.5 | 3 | 14.0 | .55 | 1.089.4203.19 |
| CD50MP-BR | - | | Solid Insert | | 1.089.4299.19 | |
| CD63M1-BR | - | M63 X 1.5 | 8 | 10.0 | .39 | 1.089.4800.19 |
| CD63M2-BR | - | | 6 | 12.0 | .47 | 1.089.4801.19 |
| CD63M3-BR | - | | 3 | 18.0 | .71 | 1.089.4802.19 |
| CD63MP-BR | - | | Solid Insert | | 1.089.4899.19 | |

| RJ45 Solution | | | | | |
|---------------------------------|------------------------------|--------------------|---------------------------|--------------|------------------------------|
| Part Numbers | | Thread Type & Size | Dimensions in Inches (mm) | | |
| -40°F to 212°F (-40°C to 100°C) | | | Cable Diameter | | Part Numbers of Inserts Only |
| | | mm | Inches | | |
| | See page 56 for thread specs | | | | |
| CD22MK-BR | M20 X 1.5 | 5.7 | .23 | 1.089.16C-06 | |
| CD22MJ-BR | (Enlarged) | 6.9 | .27 | 1.089.16C-07 | |

*Note: RJ45 Solution has no approval ratings. Reference Diagram below.

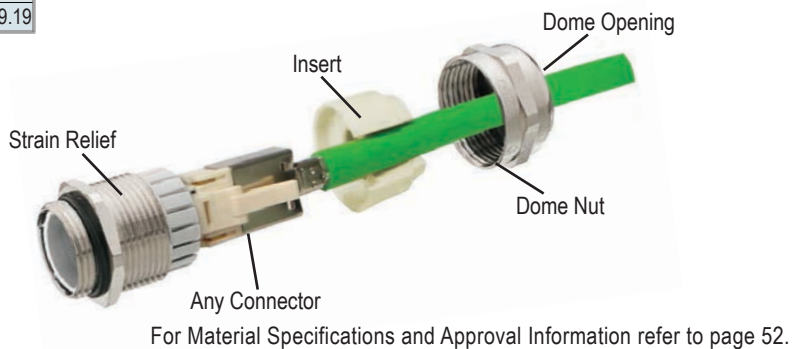

*Note: This Insert has slotted holes.
 **Note: Flex Fittings are not a standard item, assembly required.
 *Note: CSA and CE Approvals only applies to Dome Fittings.

Optional Locking Nuts, O-Rings & Other Accessories starting on Page 29 - 40.

Dome Fittings also available with the following approvals:
 ATEX
 www.SealconEX.com

For Material Specifications and Approval Information refer to page 52.