


02213

- 1) CONSTRUCTION:
- |             |   |                        |                |
|-------------|---|------------------------|----------------|
| CONDUCTOR:  | 24 AWG 7/32 STRANDED TINNED COPPER                            | NOM. DIA.              | .024"          |
| INSULATION: | SEMI-RIGID POLYVINYLCHLORIDE, .010" NOM. WALL THICKNESS       |                        | .044"          |
| CABLE:      | (2) COLOR CODED SINGLES TWISTED TO FORM A CABLE CORE.         |                        | .088"          |
| JACKET:     | POLYVINYLCHLORIDE, BLACK, .032" +/- .002" NOM. WALL THICKNESS | OVERALL CABLE DIAMETER | .150" (±.007") |
- 2) PHYSICAL PROPERTIES:
- |                          |                           |
|--------------------------|---------------------------|
| TEMPERATURE RATING, MAX. | 60°C & 80°C               |
| WT./M', NOM., NET.       | 11.8 LBS.                 |
| SUNLIGHT RESISTANCE      | PER UL 13, PARAGRAPH 24.1 |
- 3) ELECTRICAL CHARACTERISTICS:
- |                                     |              |
|-------------------------------------|--------------|
| CAPACITANCE, MUTUAL, NOM.           | 21 PF/FT.    |
| DIELECTRIC WITHSTANDING, MIN        | 1500V RMS    |
| VOLTAGE RATING, MAX.                | 300V         |
| D.C. RESISTANCE, MAX. PER ASTM B286 | 26.2 Ω/1000' |
- 4) AGENCY APPROVALS:
- CSA AWM FT4
  - NEC (UL) TYPE CM
  - UL AWM STYLE 2464
- 5) APPLICATION:
- RoHS COMPLIANT MATERIALS
- 6) PRINT:
- E118830 (UL) TYPE CM 24 AWG OR AWM 2464 -- CSA LL51726 AWM I/II A/B 80C 300V FT4 -- RoHS -- (LOT DESIGNATOR)
- 7) COLOR CODE:
- 1. BLACK
  - 2. WHITE
- 8) PACKAGING:
- TO BE PACKAGED AS PER QWC'S STANDARD PACKAGING

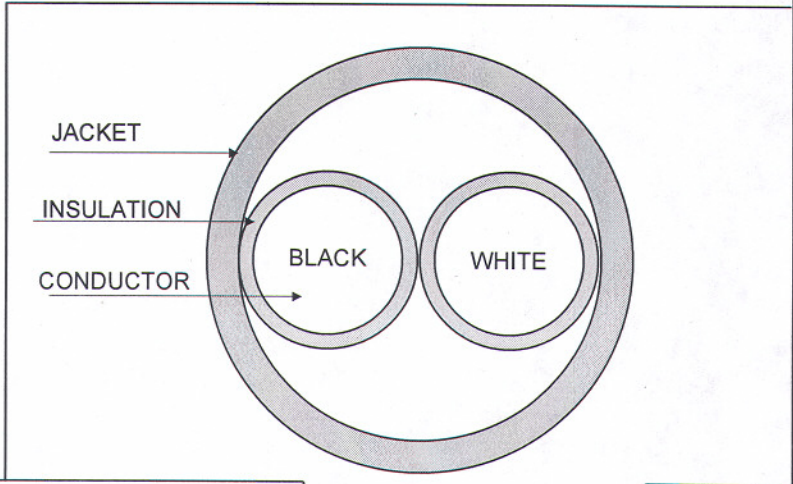

REVISION 05	DATE:	DRAWN	S. ADDIE 04/02/99	
REVISED BY	<i>B. Duceyuski</i> 6/10/08	CHECKED	G. MUNROE 04/02/99	
CHECKED	<i>G. Munroe</i> 06/10/08	CHECKED		
CHECKED		CUSTOMER APPROVAL:	DATE:	TITLE
		<i>Debra Berns</i> 6-12-08		2/C 24AWG PVC/PVC CABLE -- TYPE CM. AWM 2464. CSA AWM FT4
				QUABBIN P/N 02213 10F 1