1 PAIR 24 AWG ROHS CABLE

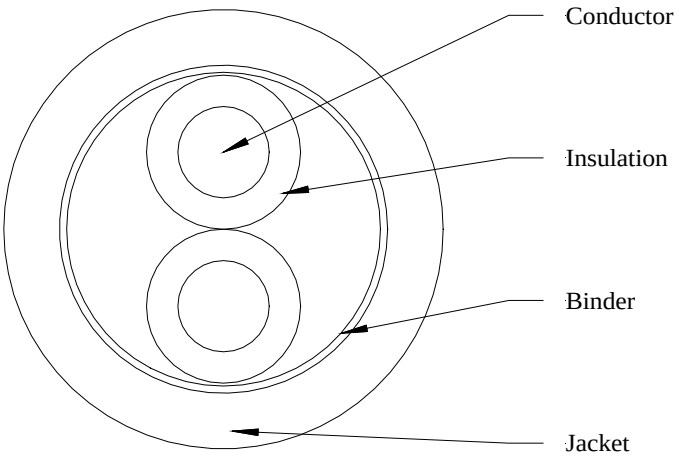

CONSTRUCTION

Single Component

Conductor: 24 AWG 19/36 Tin Plated Copper, 0.024 Inch Diameter

Insulation: 0.010 Inches of XPbT, 0.044 Inch Diameter

Final Assembly

Core: 2 Singles (#1-2) Twisted Together with a 1-1/4 Inch Left Hand Lay

Binder: Polyester Tape, 25% Overlap

Jacket: 0.032 Inches of Flexible XPbT, Color – Beige

Diameter: 0.155 Inches Nominal

Print Legend (Black Ink): "AWM STYLE 2464 80°C 300V VW-1 MADISON CABLE CSA AWM II A/B 80°C 300V FT1 RoHS COMPLIANT"

COLOR CODE

Conductor #	Insulation Color
1	Black
2	White

ELECTRICAL CHARACTERISTICS

Conductor DC Resistance: 0.024 Ohms/ft Nominal @ 20°C

SAFETY CERTIFICATION

UL Recognized: AWM Style 2464 80°C 300 Volts VW-1

CSA Certification: AWM II A/B 80°C 300 Volts FT1

RoHS Compliance: In Accordance to European Directive 2002/95/EC, Issue 13.2.2003

MADISON Cable
tyco Electronics
125 Goddard Memorial Drive · Worcester, MA 01603 USA
Tel: (508) 752-2884 Toll-Free: (877) MADISON Fax: (508) 752-4230

REVISION HISTORY

1	10/04/05	DC	Initial Release
2	12/08/05	DC	Revised print legend

Spec Number:	**101-3389**
Part Number:	**02RFALF003**
Customer:	**Hill-Rom**
Customer #:	

Prepared By:	D.M. Card		Page 1 of 1
Reviewed By:	E. Piekielniak	N. Allen	