


GeneralCable
TWO CONDUCTOR 24AWG SHIELED

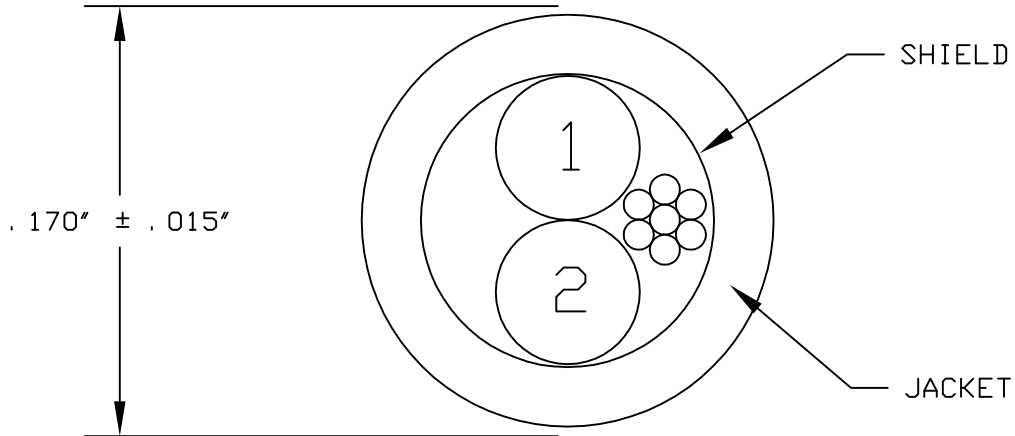

COMPONENT I- CONDUCTOR: #24AWG 19/36 TINNED COPPER
(ITEMS 1-2) INSULATION: CROSS-LINKED POLYETHYLENE-.010" NOMINAL WALL
DIAMETER: .047" NOMINAL

CABLE- CORE: TWO (2) COMPONENT I (ITEMS 1-2) + ONE (1) #24AWG 7/32 TC
DRAIN WIRE CABLED TOGETHER WITH A LEFT HAND LAY

SHIELD- .0015" ALUMINUM/MYLAR TAPE-25% MINIMUM OVERLAP
ALUMINUM SIDE IN AGAINST DRAIN WIRE

JACKET- CROSS-LINKED POLYETHYLENE-.035" NOMINAL WALL

DIAMETER- .170" NOMINAL

UL- AWM STYLE 4311 125°C 150V

CSA- AWM IIA 125°C 150V FT1

JACKET PRINT- "GENERAL CABLE BRAND REX BRAND (WC) RJ AWM STYLE 4311/CSA
AWM IIA 125C 150V FT1 ROHS COMPLIANT DAY/MONTH/YEAR"

COLOR CODE-	ITEM NUMBER	COLOR
	1	BLACK
	2	WHITE

REVISIONS	A	03/13/12	FIRST ISSUE	GeneralCable 1600 West Main Street, Willimantic, CT 06226-1128 <u>The Power of One</u>
REFERENCES	IEWC			DRAWING NO: 12-1889
	GE P/N 68A9391P224			DRAWN BY: CAD
	GeneralCable P/N 224250			APPROVED BY: M. LAJEUNESSE
	T-13891 (2/24)			THIS DRAWING IS THE PROPERTY OF GeneralCable AND SHALL NOT BE REPRODUCED, COPIED, OR USED AS BASIS FOR THE MANUFACTURE OR SALE OF THIS DESIGN WITHOUT THE PERMISSION OF GeneralCable