


This document contains proprietary and confidential information of Northwire, Inc. (and its subsidiary) and shall not be used, disclosed or reproduced, in whole or in part, for any purpose without the prior written consent of Northwire, Inc. (and its subsidiary).

Disclaimer: The technical data that is made part of this document may be subject to the International Traffic in Arms Regulation (ITAR) and the Export Administration Regulations (EAR). Disclosure of technical data to Foreign Persons in the course of employment with U.S. contractors is considered an export and is subject to the ITAR and EAR export licensing requirements/regulations.

DESCRIPTION: 24/2 CABLE 80C 30V		UNITS: IN	SCALE: 32:1	ITEM	SPECIFICATIONS
CUSTOMER: IEWC	NWI P/N: FCAB242-010	DWG NO: 2402C005		Ι.Α.	24 GAUGE 19x.0051
CUSTOMER P/N: 2402COSS-0NWA	DRAWN BY: DP LANGER	DATE: 12/2/199	98 REV: C] ["	

CORE DIMENSIONS FOR INTERNAL USE ONLY

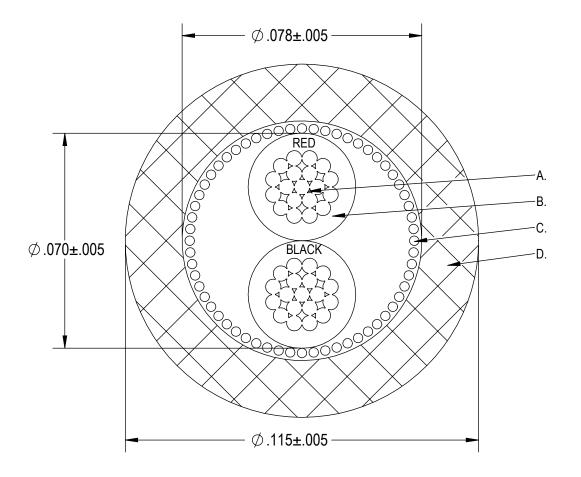

24 GAUGE 19x.005TC UNILAY

5 MIL POLYPROPYLENE INSULATION 80C 30V 4 MIL MIN. POLYPROPYLENE INSULATION O.D. .035 ± .001

90% MIN.TC SPIRAL SERVE SHIELD 40 GAUGE SINGLE ENDS

15 MIL TUBED PVC JACKET 80C 30V 12 MIL MIN. PVC JACKET BLACK JACKET NO AGENCY APPROVALS JACKET MEETS CSA FT4 FLAMABILITY

ROHS COMPLIANT MATERIALS TO EU DIRECTIVE 2011/65/EU



FOR REFERENCE ONLY

LEGEND SPECIFICATIONS

NO LEGEND ON CABLE





This document contains proprietary and confidential information of Northwire, Inc. (and its subsidiary) and shall not be used, disclosed or reproduced, in whole or in part, for any purpose without the prior written consent of Northwire, Inc. (and its subsidiary).

Disclaimer: The technical data that is made part of this document may be subject to the International Traffic in Arms Regulation (ITAR) and the Export Administration Regulations (EAR). Disclosure of technical data to Foreign Persons in the course of employment with U.S. contractors is considered an export and is subject to the ITAR and EAR export licensing requirements/regulations.

DESCRIPTION:			SCALE: 60:1	ELECTRICAL REQUIREMENTS
CUSTOMER: IEWC	NWI P/N: FCAB242-010	DWG NO: 2402C005		NONE SPECIFIED
CUSTOMER P/N: 2402COSS-0NWA	DRAWN BY: DP LANGER	DATE: 12/2/199	8 REV: C	





CHANGED JACKET MATERIAL TO FT4 MATERIAL DUROMETER CHANGED; UPDATED TO NEW DRAWING FORMAT	С	3/28/17	DPL			
CHANGED CUSTOMER PART NUMBER	В	3/9/04	DPL			
RELEASED TO MFG	Α	10/4/01	DO			
ADDED MECHANICAL REQUIREMENTS AND JACKET DUROMETER	2	12/7/98	DPL			
INITIAL RELEASE	1	12/2/98	DPL			
REVISION RECORD	REV.	REV DATE	APR			
REVISIONS						

MECHANICAL REQUIREMENTS

STORAGE SURVIVAL: -60 °F to 185 °F OPERATION: 0°F to 120°F