



DESC: 24/3 CABLE 80°C 300V

DWG NO: FCAB243-015

SCALE: 20x DATE: 02/05/07 DR. BY: C MORTON

NWI NO: FCAB243-015

CUSTOMER: HACH COMPANY

CUSTOMER P/N: 4718900

ITEM

SPECS.


- A. 24 GAUGE 19x.005TC UNILAY
O.D. .025±.002"
- B. 23 MILS PVC INSULATION
20 MILS MIN. PVC INSULATION
O.D. .070±.002"
- C. 24 GAUGE 19x.005TC DRAIN
- D. 90% MIN. TC BRAID SHIELD
36 GAUGE SINGLE ENDS
- E. CLEAR MYLAR SEPARATOR
- F. 45 MILS PRESSURED TPU JACKET
38 MILS MIN. TPU JACKET
87 SHORE A DUROMETER JACKET
CABLE IS NOT UL OR CSA APPROVED
JACKET COLOR = YELLOW
RoHS COMPLIANT MATERIALS USED

ELECTRICAL REQUIREMENTS:
NONE SPECIFIED

MECHANICAL REQUIREMENTS:
NONE SPECIFIED

NORTHWIRE RESTRICTED

This document contains Northwire, Inc. proprietary data, and is not to be copied, reproduced, used or divulged to unauthorized persons, in whole or in part, without proper authorization in writing from Northwire, Inc. This information is the property of Northwire, Inc. which reserves all rights to it.

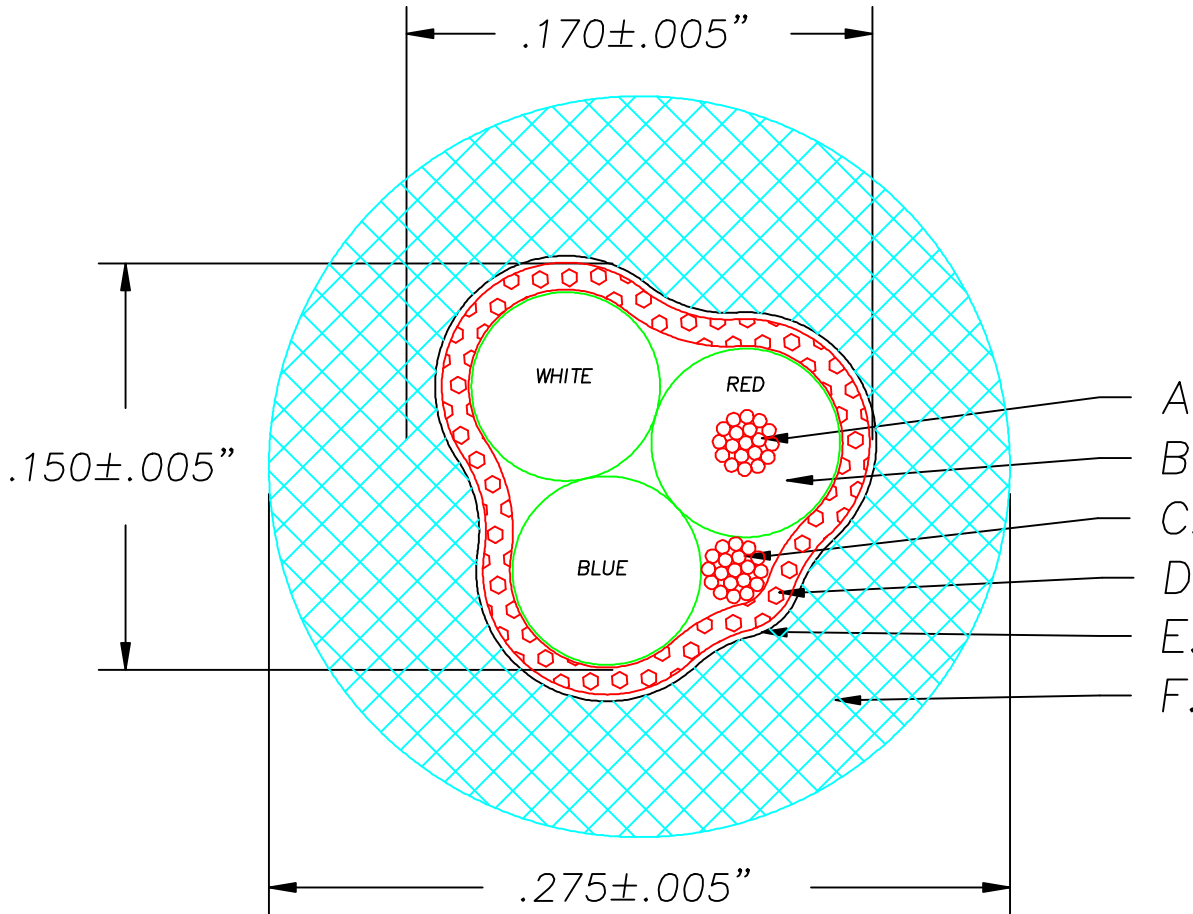

Change jacket color from orange	B	06/05/07	cjm	1/BB
INITIAL RELEASE	A	2/5/07	CJM	1/BB
REVISION RECORD	REV	REV DATE	APPROVAL	APPROVAL