


232 Sherman Street Gardner, MA 01440
 Phone: 978-632-0900 Fax: 978-630-1872
 Visit us on our website: www.dataguidecable.com

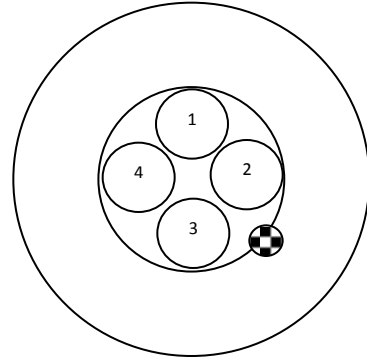

**4 CONDUCTOR 24 AWG PVC INSULATED CABLE
 FOIL SHIELDED WITH PVC JACKET
 UL AND CSA RATED**

CONDUCTOR:

- 24 AWG 7 Strands Tinned Annealed Copper in Accordance with ASTM B-8 and B-33

DIELECTRIC:

- .010" Nominal Wall Thickness S-R PVC to Diameter of .044"

COLOR CODE:

- As Indicated

CABLE ASSEMBLY:

- Lay Length: 1 3/4" Nominal Left Hand Direction
 - Foil Shield: .0012" Nominal Thickness Aluminum/Polyester Tape, Foil Out
 - Drain: 24 AWG 7 Strand Tinned Copper over Foil Shield

JACKET:

- Material: Thermoplastic PVC
 - Color: Black
 - Wall Thickness: .032" Nominal
 - Finished Cable Diameter: .180" Nominal

CABLE IDENTIFICATION:

- Type: Surface Print on Jacket
 - Ink Color: White
 - Legend: "E123820 #24 (UL) TYPE CM 75C ALSO AWM 2464 - - - LL91737
 CSA AWM I A/B II A/B 80C 300V FT4"

COLOR CODE

CONDUCTOR	COLOR
1	BLACK
2	WHITE
3	RED
4	GREEN

LISTINGS/AGENCY APPROVAL

- UL CM 75C, AWM 2464
 - CSA AWM FT4
 - RoHS

REVISION HISTORY

-	4/30/15	WD	INITIAL RELEASE

Customer Number	
D.G. Part Number	99D27-5
Prepared By:	KAM
Reviewed By:	WJD