




ATLAS WIRE CORP

1601 Glenlake Ave. Itasca, IL 60143
(847) 678-1210
(847) 678-1281 FAX
www.atlaswirecorp.com




SPECIFICATION SHEET

Atlas Part #: 2407X1061

Description: #24 7/32 TOPCOAT .010" PVC

A - CONDUCTOR:	#24 7/32 TOPCOAT STRANDED COPPER	
A1	NOMINAL O.D.	0.024"
	STANDARD	ASTM B 470 TYPE I
B - INSULATION:	MATERIAL	PVC
	TEMPERATURE RATING	105c
	VOLTAGE RATING	300v
	ELONGATION	300% AVERAGE
	TENSILE STRENGTH	3,210 PSI AVERAGE
B1	WALL THICKNESS (APPROX)	0.010"
B2	INSULATED O.D. (APPROX)	0.044"

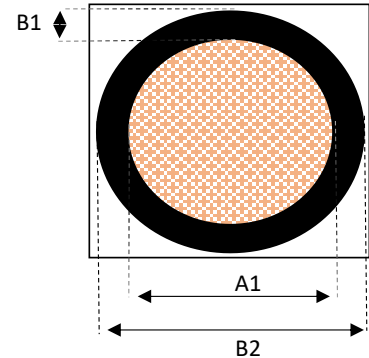

PRODUCT WEIGHT: WEIGHT / THOUSAND FEET (APPROX) 2.14 lbs.

REGULATORY COMPLIANCES REACH, RoHS, UL, CSA

PRINT LEGEND 24 AWG E25635 RU AWM STYLE 10002 105c - 300v OR AWM STYLE 1061 80c - 300v VW-1 CSA 150272 AWM I-A/B 80c - 300v FT1 S-R PVC

IMPORTANT:

All measurements are nominal, comply with applicable standards, and are subject to change. We make every reasonable effort to ensure data is current and accurate but there may be errors or omissions. It is the user's responsibility to ensure the product is relevant to their applicable usage, and according to their local codes. The sale of this product is subject to Atlas Wire LLC's standard terms and conditions.