


51 S. Walnut St., P.O. Box 348
 Wauregan, Ct 06387-0348
 Phone: (860) 774-4812
 Fax: (860) 774-7330



<http://www.cmccorporation.com/>

"OUR SUCCESS DEPENDS ON YOUR SATISFACTION"

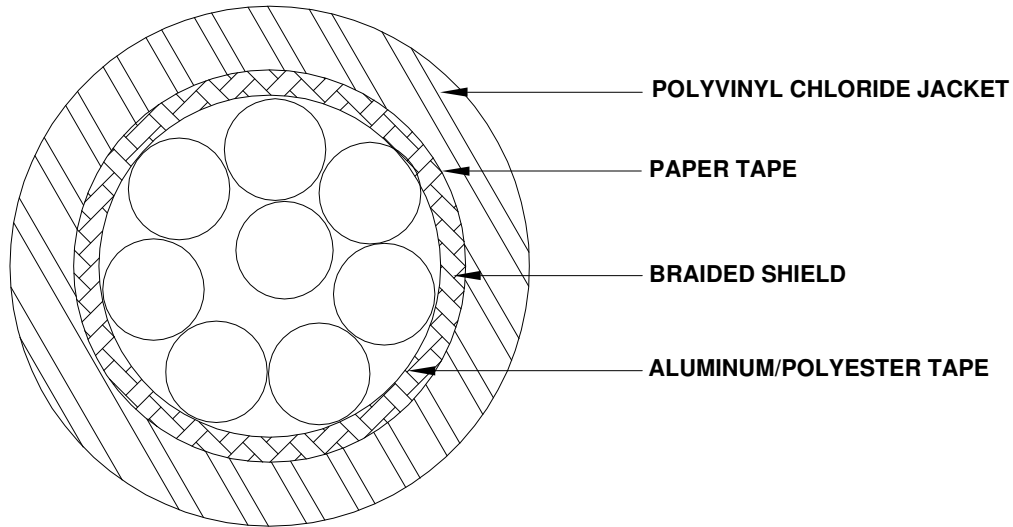

1.0 PRIMARY:

24 AWG (19/36) Bare Copper
 Polyvinyl Chloride, .049" ± .002" Diameter

Twisted Pairs:

- Color Code: 1. Black & Red 2. Black & White
 3. Black & Green 4. Black & Blue
 5. Black & Yellow 6. Black & Brown
 7. Black & Orange 8. Red & White

2.0 OVERALL CABLING:

Twisted Pairs: 8
 Aluminum (Out)/Polyester Tape, 25% Overlap

3.0 BRAIDED SHIELD:

38 AWG Tinned Copper, 85% Min Coverage

4.0 JACKET:

Tissue Tape – Optional
 Polyvinyl Chloride, .059" Wall Thickness
 .412" ± .015" Final Diameter
 Color: Gray, Semi-Gloss

Print Legend: E41663 24AWG 8/P **LR** AWM 20106
 105°C 300V --- LL33361 CSA AWM I/II A/B 105°C 300V FT1

5.0 SAFETY CERTIFICATION:

UL AWM: 20106, 105°C, 300V
 CSA: AWM I/II A/B 105°C 300V FT1

6.0 FINISHED PRODUCT REQUIREMENTS:

RoHS Compliant per European Union Directive
 2002/95/EC

7.0 ELECTRICAL CHARACTERISTICS:

Conductor DCR: 23.64 Ohms/MFT @ 20°C Max.

A	Initial Release	Harvey John-Charles 08/18/08	ALL VALUES ARE NOMINAL UNLESS OTHERWISE SPECIFIED PROPRIETARY INFORMATION DO NOT DUPLICATE WITHOUT WRITTEN CONSENT FROM C&M		C&M DESCRIPTION 8 CONDUCTOR OVERALL SHIELDED & JACKETED CABLE	
REV	DESCRIPTION	ENG/DATE	APPROVALS		DATE	C&M PART NUMBER
REVISION STATUS			DRAWN:	RPZ	08/18/2008	75558
			CHECK:	CBF	08/18/2008	SHEET 1 OF 1
						REV. A