

## HyperPlus 5e Riser Rated Category 5e UTP

Berk-Tek's HYPER PLUS 5e Standard Category 5e UTP Cables are designed for horizontal network and voice applications in a structured cabling network to connect between the user outlet and horizontal cross-connect.

### Description

#### Berk-Tek HyperPlus 5e, Performance Guaranteed

Your business demands continuous performance from your IT network, so our specifications aren't simply numbers on the page. They define the way that we do business. This means that you are **guaranteed** industry-leading performance and quality for all Berk-Tek products.

Some other manufacturers talk about "typical" values, at Berk-Tek, we hold ourselves to a higher standard. We won't talk about typicals, we talk about what is true, guaranteed, and independently verified.

Keep your business running by relying on Berk-Tek.

**Perform Beyond Expectations... Choose Berk-Tek.**

#### Construction

24 AWG bare copper wire insulated with thermoplastic. Two insulated conductors twisted together to form a pair and four such pairs cabled to form the basic unit, jacketed with flame-retardant PVC.

#### Flame Rating



- Riser - NFPA 262, CMR
- UL Listed

#### Features

- Supports most data and voice applications
- ETL Verified to TIA/EIA-568-C.2
- RoHS Compliant

#### Benefits

- Universally accepted design for global commercial network installations
- Simplified structured cabling solution preserving long-term network investment
- Characterized to 350 Mhz, 250 Mhz greater than the standard

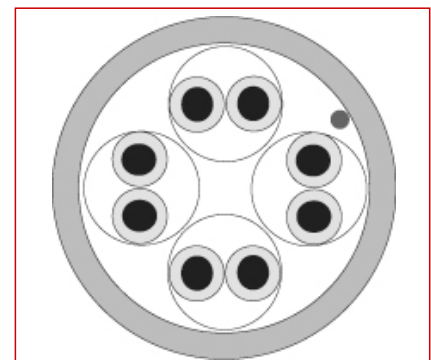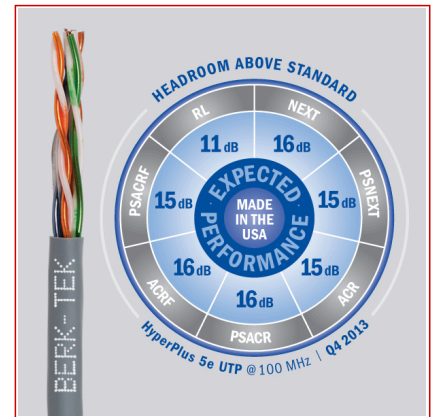

#### Standards

International ISO/IEC 11801

National ANSI/TIA-568-C.2; UL 444

## HyperPlus 5e Riser Rated Category 5e UTP

### Characteristics

Dimensional characteristics	
Number of pairs	4
Usage characteristics	
Category	Cat. 5e

### Product List

☎=Make to order, 📦=In stock

Part Number	Description	Colour	Length per reel (ft)	Packaging
📦 10032533	HyperPlus 5e Riser	White	1000.0	Reel in a box
📦 10032537	HyperPlus 5e Riser	Green	1000.0	Reel in a box
📦 10032526	HyperPlus 5e Riser	Blue	1000.0	Reel in a box
📦 10032534	HyperPlus 5e Riser	White	1000.0	Reel
📦 10044105	HyperPlus 5e Riser	Black	1000.0	Reel
📦 10034515	HyperPlus 5e Riser	Red	1000.0	Reel
📦 10032538	HyperPlus 5e Riser	Green	1000.0	Reel
📦 10032535	HyperPlus 5e Riser	White	1000.0	Box
📦 10032529	HyperPlus 5e Riser	Yellow	1000.0	Reel in a box
📦 10032527	HyperPlus 5e Riser	Blue	1000.0	Reel
📦 10032536	HyperPlus 5e Riser	Black	1000.0	Box
📦 10068825	HyperPlus 5e Riser	Violet	1000.0	Reel
📦 10033584	HyperPlus 5e Riser	Red	1000.0	Box
📦 10073294	HyperPlus 5e Riser	Orange	1000.0	Reel
📦 10032539	HyperPlus 5e Riser	Green	1000.0	Box
📦 10032530	HyperPlus 5e Riser	Yellow	1000.0	Reel
📦 10032528	HyperPlus 5e Riser	Blue	1000.0	Box
📦 10044832	HyperPlus 5e Riser	Violet	1000.0	Box
📦 10033808	HyperPlus 5e Riser	Orange	1000.0	Box
📦 10032532	HyperPlus 5e Riser	Pink	1000.0	Box
📦 10032531	HyperPlus 5e Riser	Yellow	1000.0	Box
📦 10032508	HyperPlus 5e Riser	Grey	1000.0	Reel in a box
📦 10032509	HyperPlus 5e Riser	Grey	1000.0	Reel
📦 10032510	HyperPlus 5e Riser	Grey	1000.0	Box
📦 10163324	HyperPlus 5e Riser	Black	1000.0	Reel in a box
📦 10163325	HyperPlus 5e Riser	Red	1000.0	Reel in a box
📦 10116981	HyperPlus 5e Riser	Brown	1000.0	Reel
📦 10104234	HyperPlus 5e Riser	Brown	1000.0	Box
📦 10043082	HyperPlus 5e Riser	Pink	1000.0	Reel in a box
📦 10116980	HyperPlus 5e Riser	Pink	1000.0	Reel
📦 11074706	HyperPlus 5e Riser 1500 ft. smartPAK	Blue	1500.0	Box
📦 11074748	HyperPlus 5e Riser 1500 ft. smartPAK	White	1500.0	Box
📦 11074749	HyperPlus 5e Riser 1500 ft. smartPAK	Grey	1500.0	Box

☎ = Make to order, 📦 = In stock

## HyperPlus 5e Riser Rated Category 5e UTP

### HyperPlus 5e Parametric Data: Electrical

FQ = Frequency (MHz) / TIA = TIA Spec / PG = Product Guarantee

FQ	RL (dB)		NEXT (dB)		PSNEXT (dB)		ACRF (dB)		LCL/TCL
	TIA	PG	TIA	PG	TIA	PG	TIA	PG	PG
1	20.00	20.00	65.30	66.30	62.30	62.30	63.80	63.80	40.00
4	23.00	23.00	56.30	53.30	53.30	53.30	51.80	51.70	40.00
10	25.00	25.00	50.30	47.30	47.30	47.30	43.80	43.80	40.00
16	25.00	25.00	47.20	44.30	44.20	44.30	39.70	39.70	38.00
20	25.00	25.00	45.80	46.80	42.80	42.80	37.80	37.70	37.00
31.25	23.60	24.30	42.90	43.90	39.90	39.90	33.90	33.90	35.10
62.5	21.50	21.50	38.40	39.40	35.40	35.40	27.90	27.80	32.00
100	20.10	20.10	35.30	36.30	32.30	32.30	23.80	23.80	30.00
150	—	18.90*	—	33.70*	—	29.70*	—	—	28.20*
200	—	18.00*	—	31.80*	—	27.80*	—	—	27.00*
250	—	17.30*	—	30.30*	—	26.80*	—	—	26.00*
300	—	16.80*	—	29.20*	—	25.20*	—	—	25.20*
350	—	16.30*	—	28.20*	—	24.20*	—	—	24.60*

FQ	IL (dB/100 m)		ACR (dB/100 m)		PSACR (dB/100 m)		PSACRF (dB/100 m)		EL TCTL
	TIA	PG	TIA	PG	TIA	PG	TIA	PG	PG
1	2.00	2.00	63.30	64.30	60.30	60.30	60.80	60.80	35.00
4	4.10	4.10	52.20	53.20	49.20	49.20	48.80	48.70	23.00
10	6.50	6.50	43.80	44.80	40.80	40.80	40.80	40.80	15.00
16	8.20	8.20	39.00	40.00	36.00	36.00	36.70	36.70	10.90
20	9.30	9.30	36.50	37.50	33.50	33.50	34.80	34.80	9.00
31.25	11.70	11.70	31.20	32.20	28.20	28.20	30.90	30.90	5.10
62.50	17.00	17.00	21.40	22.40	18.40	18.40	24.90	24.80	—
100	22.00	22.00	13.30	14.30	10.30	10.30	20.80	20.80	—
150	—	27.50*	—	6.10*	—	2.10*	—	—	—
200	—	32.40*	—	-0.60*	—	-4.60*	—	—	—
250	—	36.90*	—	-6.50*	—	-10.50*	—	—	—
300	—	41.00*	—	-11.80*	—	-15.80*	—	—	—
350	—	44.90*	—	-16.70*	—	-20.70*	—	—	—

\*Values provided for reference only

### HyperPlus 5e Riser UTP Physical Data

Technical Data - Physical			Color Code		
Conductor	24 AWG Bare Copper		Pair-1	White/Blue	Blue
Conductor diameter - in. (mm)	0.020	(0.51)	Pair-2	White/Orange	Orange
Insulated conductor dia.-in.(mm)	0.035	(0.89)	Pair-3	White/Green	Green
Cable diameter - in. (mm)	0.19	(4.826)	Pair-4	White/Brown	Brown
Nom. cable wt.-lb./kft. (kg/kft)	17.8	(8.07)	Temperature Rating (degrees C)		
Max. installation tension - lb. (N)	25	(110)	Installation	0 to +50	
Min. bend radius - in. (mm)	1.00	(25.40)	Operation	-20 to +75	

### HyperPlus 5e Riser Technical Data - Parametric Measurements

Mutual Capacitance	4.9 nF/100 m max.	Pair to Ground Unbalance	330 pF/100 m max.
DC Resistance	9.38 Ohms/100 m max.	Velocity of Propagation	70% nom.
Skew	25 ns/100 m max.	DC Resistance unbalance	5% max.

**Contact**

Copper LAN Product Inquiry  
Phone: 717-354-6200  
berktek.support@nexans.com

## HyperPlus 5e Riser Rated Category 5e UTP

### Supported Category 5e Applications

STANDARD	APPLICATION	SPEED
IEEE 802.3	1000BASE-T	1 Gb/s
ATM	155Mb/s	155 Mb/s
IEEE 802.3	100BASE-TX	100 Mb/s
CDDI		100 Mb/s
IEEE 802.3	10BASE-T	10 Mb/s

### HyperPlus 5e UTP Riser Jacket Legend

BERK-TEK HYPER-PLUS 24 AWG CMR 75C(UL)US ETL VERIFIED TIA-568-C.2 CAT 5E & ISO/IEC 11801 CAT 5 [ANY APPLICABLE PATENTS]  
[DATECODE] [SEQ#] FT

### Selling information

PLEASE NOTE: In the interest of product improvement, Berk-Tek, a Nexans company may make improvements or changes in the products, the programs or services described at any time without notice. Additionally, the information contained herein may include typographical errors or technical inaccuracies. Changes will be periodically made to address any such issues.