

1) CONSTRUCTION: NOM. DIA.
 CONDUCTOR: 24 AWG 7/32 STRANDED TINNED COPPER .024"
 INSULATION: LEAD FREE SEMI-RIGID POLYVINYLCHLORIDE, .010" NOM. WALL THICKNESS .044"
 CABLE: (10) INSULATED CONDUCTORS TWISTED TOGETHER TO FORM A CABLE CORE .175"
 SHIELD: ALUMINIZED POLYESTER FOIL SHIELD, 100% COVERAGE WITH A 24 AWG STRANDED TINNED COPPER DRAIN WIRE CONTACTING THE METALIZED SURFACE FOR EASY TERMINATION. .178"
 JACKET: LEAD FREE POLYVINYLCHLORIDE, CHROME GRAY, .035" NOM. WALL THICKNESS OVERALL CABLE DIAMETER .237"

2) PHYSICAL PROPERTIES:
 TEMPERATURE RATING, MAX. 60°C & 80°C
 WT./M', NOM., NET. 36.4 LBS.


3) ELECTRICAL CHARACTERISTICS:
 CAPACITANCE, MUTUAL, NOM. 30 PF/FT.
 CAPACITANCE, GROUNDED, NOM. 55 PF/FT.
 DIELECTRIC WITHSTANDING, MIN 1500V RMS
 VOLTAGE RATING, MAX. 300V
 D.C. RESISTANCE, MAX. PER ASTM B286 26.2 OHMS/M'

4) AGENCY APPROVALS:
 NEC (UL) TYPE CM
 (UL) AWM STYLE 2464 80C 300V
 CSA AWM FT4

5) APPLICATION:
 RS-232 COMPUTER INTERCONNECT, INSTRUMENTATION, SOUND, BROADCAST, CLASS 2 CIRCUITS.
 RoHS COMPLIANT MATERIALS.

6) PRINT:
 QUABBIN 8200R (UL) TYPE CM 24 AWG SHIELDED OR AWM 2464 -- CSA LL51726 AWM I/II A/B 80C 300V FT4 -- RoHS -- **(LOT DESIGNATOR)**

7) COLOR CODE:
 1. BLACK
 2. WHITE
 3. RED
 4. GREEN
 5. BROWN
 6. BLUE
 7. ORANGE
 8. YELLOW
 9. VIOLET
 10. GRAY

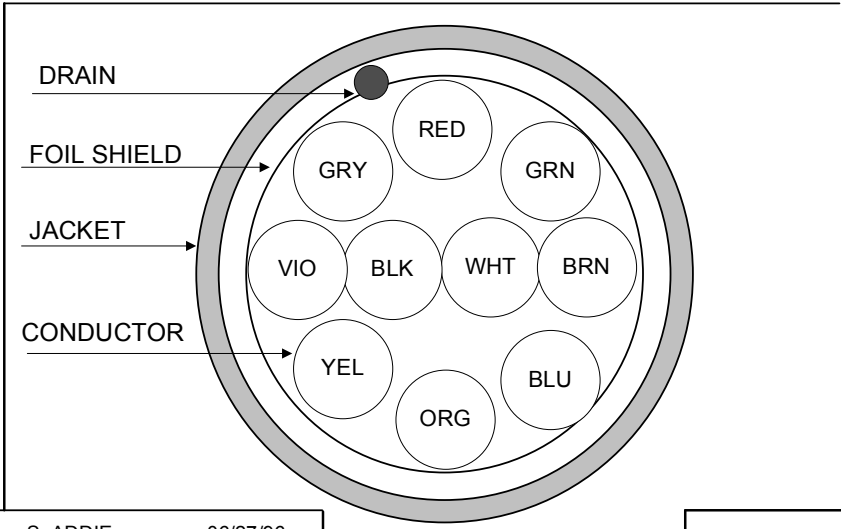

8) PACKAGING:
 TO BE PACKAGED AS PER QWC'S STANDARD PACKAGING

REVISION 03	DATE:	DRAWN S. ADDIE	06/27/96	
REVISED BY	B. DUCZYNSKI 3/28/05	CHECKED J. RIVERNIDER	06/27/96	
CHECKED	J. RIVERNIDER 3/28/05	CHECKED M. FERRERO	06/28/96	
CHECKED		CUSTOMER APPROVAL:	DATE:	TITLE
				10/C 24 AWG PVC/PVC SHIELDED CABLE
				TYPE CM, STYLE 2464, CSA AWM FT4
				QUABBIN P/N 8200
				1 OF 1