


29 HANOVER ROAD
 FLORHAM PARK, NJ 07932
 (800) 774-3539

Customer Specification

Lapp Spec # 602402S - 602461S Date: 04/15/2012

Description Product Name: 24 AWG UNITRONIC 190CY Series
24AWG Multi-conductor shielded signal and control cable with color coded (Chart 2) SR-PVC insulation, and a flame and oil resistant Gray PVC jacket , UL Type CMG or CSA CMG or AWM 300 Volts 90C. Conforms to EN 2002/95/EC (RoHS Directive).

* All dimensions are nominal and inches unless specified, [] = mm *

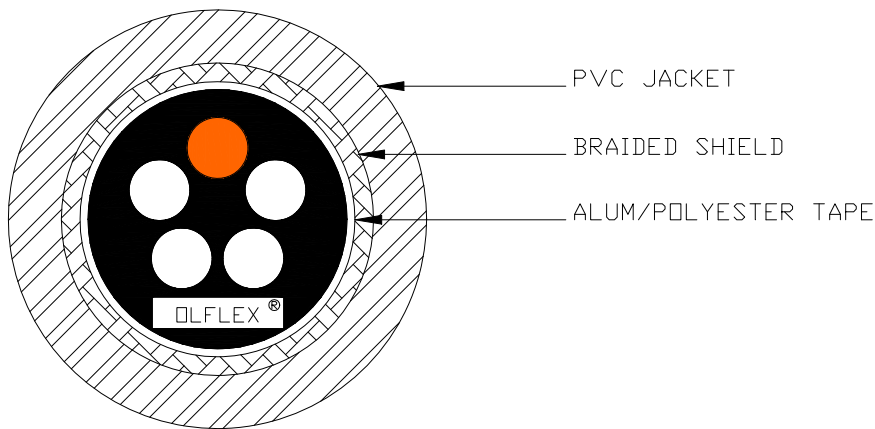

Lapp USA P/N	No. Cond.	Jacket Wall Nom.	Jacket Diameter Nom.
602402S	2	.040	.196
602403S	3	.040	.203
602404S	4	.040	.214
602405S	5	.040	.227
602407S	7	.040	.240
602408S	8	.040	.254
602410S	10	.040	.284
602412S	12	.040	.291
602414S	14	.040	.302
602415S	15	.040	.315
602416S	16	.040	.315
602418S	18	.040	.328
602420S	20	.040	.342
602421S	21	.040	.342
602425S	25	.040	.366
602428S	28	.040	.388
602430S	30	.045	.400
602432S	32	.045	.413
602436S	36	.045	.426
602440S	40	.045	.439
602444S	44	.045	.470

602450S	50	.045	.488
602461S	61	.053	.546