


DESC: 24/24 CABLE 135C 300V (12 PAIR)	DWG NO: FCAB2424-001
SCALE: 10x	DATE: 8/2/10
CUSTOMER:	DR. BY: KEN D
	CUSTOMER P/N:
	NW P/N: FCAB2424-001

This document contains proprietary and confidential information of Northwire, Inc. (and its subsidiary) and shall not be used, disclosed or reproduced, in whole or in part, for any purpose without the prior written consent of Northwire, Inc. (and its subsidiary).

COLOR ROTATION IS NOT CRITICAL

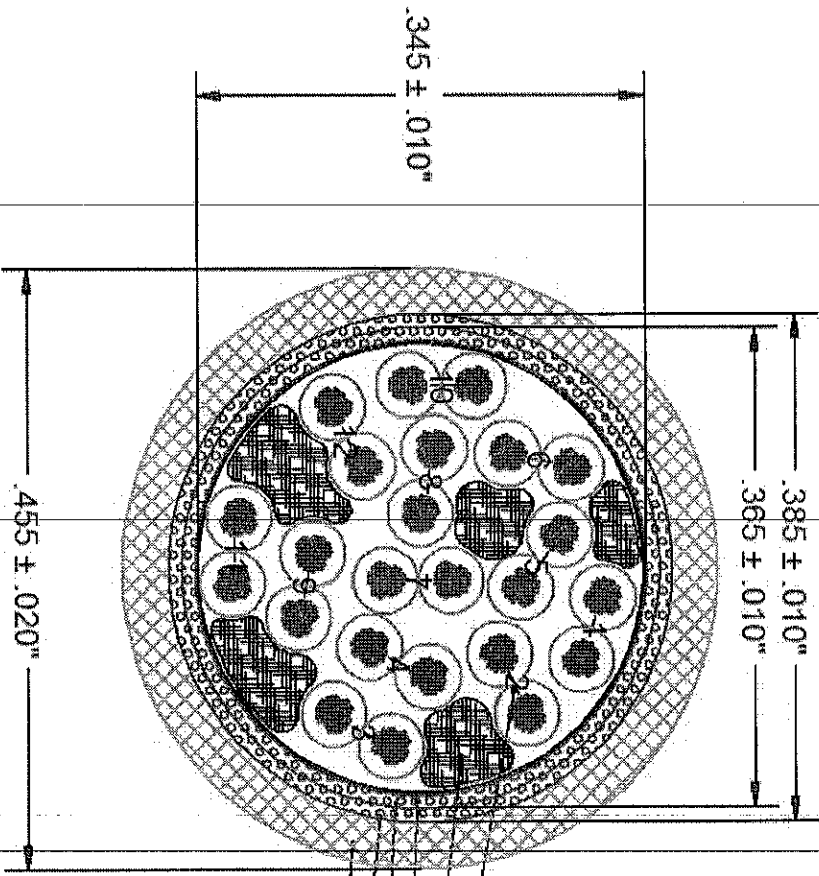

- COLORS:
1. BLACK-RED
  2. BLACK-WHITE
  3. BLACK-GREEN
  4. BLACK-BLUE
  5. BLACK-YELLOW
  6. BLACK-BROWN
  7. BLACK-ORANGE
  8. RED-WHITE
  9. RED-GREEN
  10. RED-BLUE
  11. RED-YELLOW
  12. RED-BROWN

- A.  
B.  
C.  
D.  
E.  
F.

ITEM	SPEC.
A1	24 GAUGE 41X40 TINNED COPPER STRANDING D.O. .023 +/- .0015"
A2	12 MILS SANTOPRENE INSULATION 10 MILS MIN. SANTOPRENE INSULATION D.O. .050 ± .002"



B.	POLY FILLER
C.	CLEAR MYLAR TAPE WRAP
D.	36 GAUGE BRAID SHIELD, 90% COVERAGE
E.	36 GAUGE BRAID SHIELD, 90% COVERAGE
F.	35 MILS TUBED SANTOPRENE JACKET 28 MILS MIN. SANTOPRENE JACKET COLOR: BLACK

NO AGENCY APPROVALS  
ROHS COMPLIANT

ELECTRICAL REQUIREMENTS:  
NONE SPECIFIED

MECHANICAL REQUIREMENTS:  
NONE SPECIFIED

CORE DIMENSIONS FOR INTERNAL USE ONLY

LEGEND: NONE

INITIAL RELEASE	REVISION RECORD
A	8/2/10 KAD
REV	REV DATE APR 1 APR 2 QA R